TOP ALTITUDE: 10000

RADAR required.

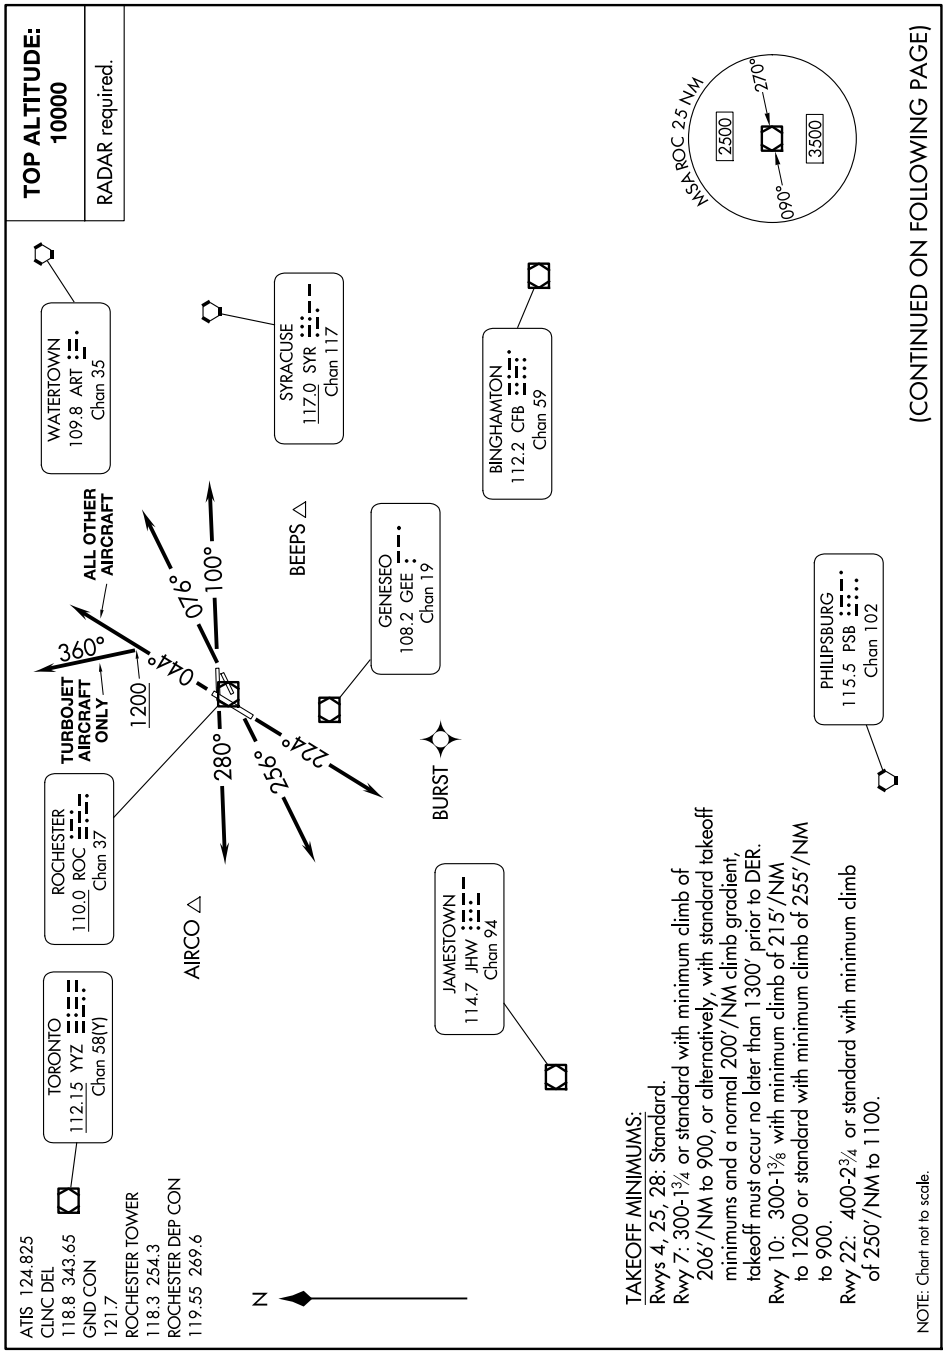

(CONTINUED ON FOLLOWING PAGE)

ATIS 124.825
CLNC DEL
118.8 343.65
GND CON
121.7
ROCHESTER TOWER
118.3 254.3
ROCHESTER DEP CON
119.55 269.6

TAKEOFF MINIMUMS:
Rwys 4, 25, 28: Standard.
Rwy 7: 300-1¾ or standard with minimum climb of 206′/NM to 900, or alternatively, with standard takeoff minimums and a normal 200′/NM climb gradient, takeoff must occur no later than 1300′ prior to DER.
Rwy 10: 300-1⅜ with minimum climb of 215′/NM to 1200 or standard with minimum climb of 255′/NM to 900.
Rwy 22: 400-2¾ or standard with minimum climb of 250′/NM to 1100.

NOTE: Chart not to scale.