
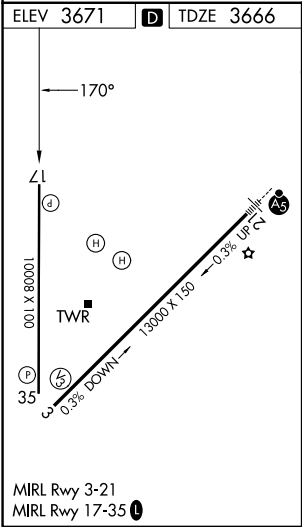


WAAS CH 65702 W17A	APP CRS 170°	Rwy Ldg 10008 TDZE 3666 Apt Elev 3671
--	------------------------	--

RNAV (GPS) RWY 17

ROSWELL AIR CENTER (ROW)

RNP APCH - GPS.		MISSED APPROACH: Climb to 6000 direct KIGDE and hold.			
ASR For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -22°C or above 41°C . When local altimeter setting not received, use Artesia altimeter setting: increase LPV DA to 3996 feet and all visibilities ¼ SM; increase LNAV/VNAV DA to 4083 feet; increase all MDAs 80 feet and visibility LNAV Cat C ¼ SM and Circling Cat D ¼ SM. VDP and Baro-VNAV NA when using Artesia altimeter setting.					
ATIS 128.45 306.2	ROSWELL APP CON* 119.6 239.0	ROSWELL TOWER* 118.5 (CTAF) 0 233.7	GND CON 121.9 348.6	CLNC DEL 132.875 282.25	UNICOM 122.95

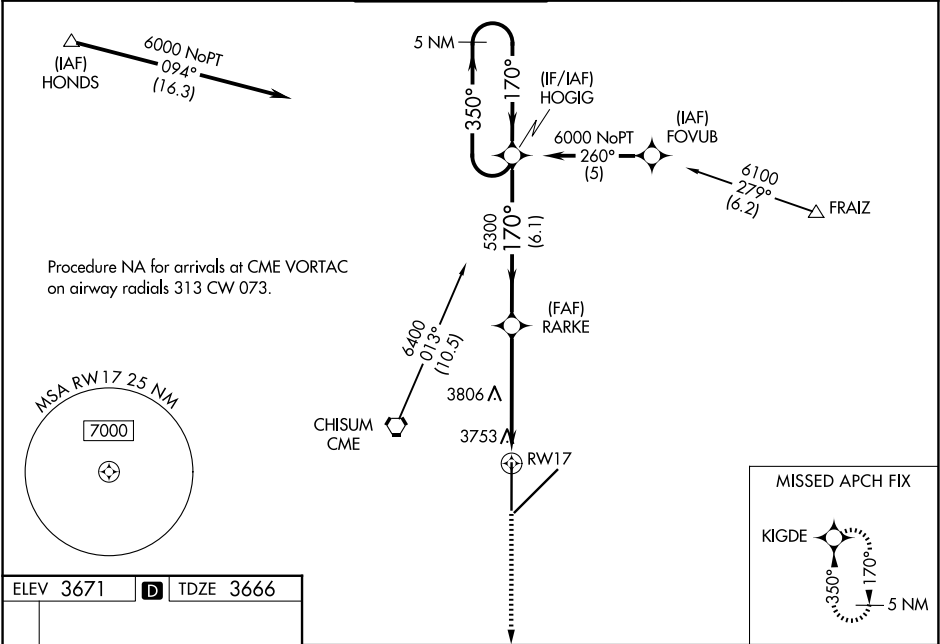

6000 KIGDE		HOGIG 5 NM Holding Pattern			
1.3 NM to RWY17		1.3 NM		3.6 NM	
RWY17		3.6 NM		6.1 NM	
CATEGORY	A	B	C	D	
LPV DA	3916-3¼ 250 (300-¾)				
LNAV/VNAV DA	4003-1¼ 337 (400-1¼)				
LNAV MDA	4120-1	454 (500-1)	4120-1¼ 454 (500-1¼)	4120-1½ 454 (500-1½)	
CIRCLING	4140-1¼	469 (500-1¼)	4140-1½ 469 (500-1½)	4300-2 629 (700-2)	

SW-1, 02 OCT 2025 to 30 OCT 2025

SW-1, 02 OCT 2025 to 30 OCT 2025