

25219

LOC/DME I-LMR <u>109.7</u> Chan 34	APP CRS 123°	Rwy Ldg 10553 TDZE 540 Apt Elev 617	12R 8956 12L 541 617
---	------------------------	--	---

ILS or LOC RWY 12R
ST LOUIS LAMBERT INTL (STL)


▼ LOC only: Rwy 12R helicopter visibility reduction below RVR 4000 NA. Inop tabs does not apply to sidestep Rwy 12L. For inop ALS, increase S-ILS 12R Cat E visibility to RVR 4000 and increase S-LOC 12R Cats A/B visibility to RVR 5500, Cats C/D/E visibility to RVR 6000. Simultaneous approach authorized with Rwy 11. Simultaneous approach authorized with Rwy 12L requires use of vertical guidance; maintain last assigned altitude until established on glideslope.

MALSR
Rwy 12R

ALSF-2
Rwy 12L

MISSED APPROACH: Climb to 5000 on STL VORTAC R-128 to FONTI INT/STL 22.4 DME and hold, continue climb-in-hold to 5000.

D-ATIS 125.025 379.925	ST. LOUIS APP CON 132.125 360.6	ST. LOUIS TOWER 118.5 257.7	GND CON 121.9 348.6 (Inbound) 121.65 377.175 (Outbound) 118.925 227.125 (Rwy 11/29)	CLNC DEL 119.5 363.1	CPDLC
--	---	---------------------------------------	---	--------------------------------	-------

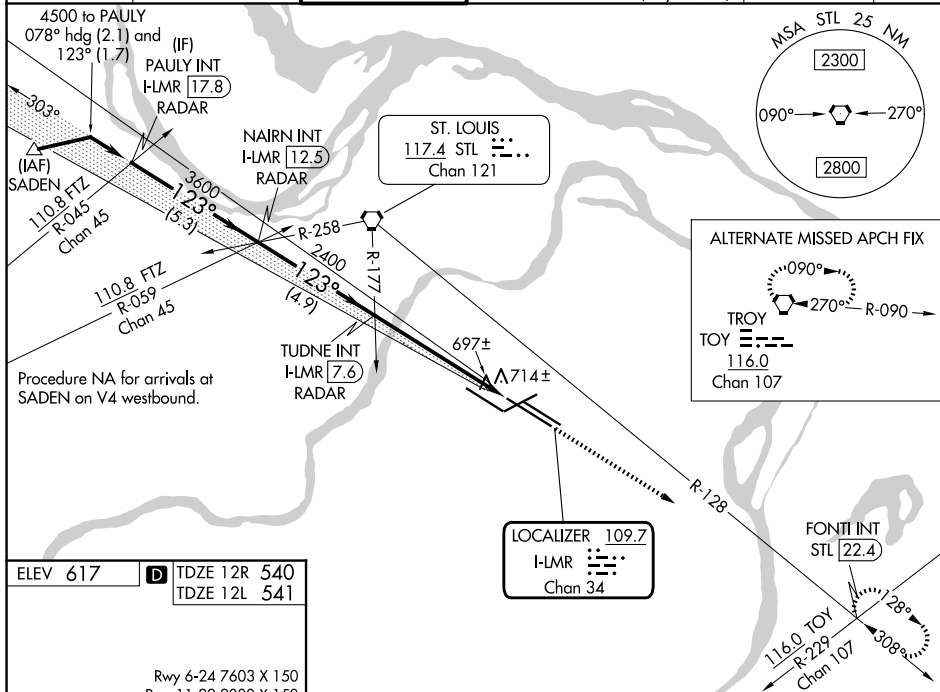

Rwy 11-29 9000 X 150
Rwy 12L-30R 9013 X 150
Rwy 12R-30L 11020 X 150

123°

0.6 NM
10% DOWN

0.7 NM
10% DOWN


0.7 NM
10% DOWN

123°

30L

HIRL all Rwys
TDZ/CL Rwys 11, 12L, 12R, 29, and 30R

FAF to MAP 5.7 NM					
Knots	60	90	120	150	180
Min:Sec	5:42	3:48	2:51	2:17	1:54

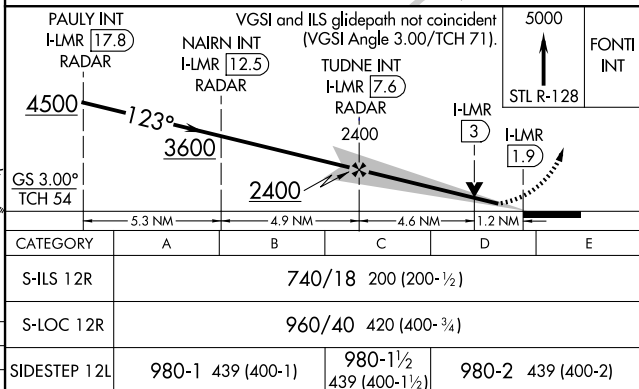

ST. LOUIS, MISSOURI
Amdt 23A 17APR25

38°45'N-90°22'W

ST LOUIS LAMBERT INTL (STL)
ILS or LOC RWY 12R

NC-3, 02 OCT 2025 to 30 OCT 2025