

WAAS CH 86202 W31A	APP CRS 313°	Rwy Idg 5811 TDZE 214 Apt Elev 214
--	------------------------	---

RNAV (GPS) RWY 31
MCNARY FLD (SLE)


RNP APCH.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C
When local altimeter setting not received, use Mc Minnville altimeter setting and increase
all DA 49 feet; increase all MDAs 60 feet; increase LNAV/VNAV visibility all Cats to 1 ½ SM,
LNAV Cat C and D visibility to 2 SM, and Circling Cat A visibility to 1¼ SM and Cat C visibility
to 2¼ SM. Baro-VNAV and VDP NA when using Mc Minnville altimeter setting. For inop ALS
increase LNAV/VNAV all Cats visibility to 1 ½ SM and increase LNAV Cat C and D visibility to
2½ SM. For inop ALS when using Mc Minnville altimeter setting, increase LPV all Cats visibility
to 4500, increase LNAV/VNAV all Cats visibility to 2 SM, increase LNAV Cats C and D
visibility to 2½ SM. **RVR 1800 authorized with use of FD or AP or HUD to DA, NA when
using Mc Minnville altimeter setting.


MALSR
A5

MISSED APPROACH:
Climb to 3700 direct
ARTTY and hold,
continue climb-in-hold
to 3700.

ATIS 124.55	SEATTLE CENTER 125.8 291.7	SALEM TOWER ★ 119.1 (CTAF) 0 257.2	GND CON 121.9	UNICOM 122.95
----------------	-------------------------------	---------------------------------------	------------------	------------------

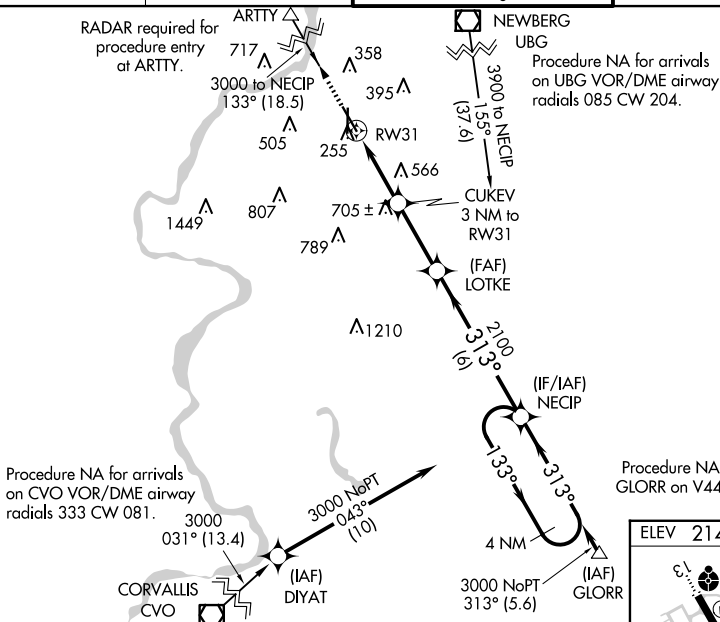


MISSED APCH FIX



2564

Procedure NA for arrivals at GLORR on V448 Southbound

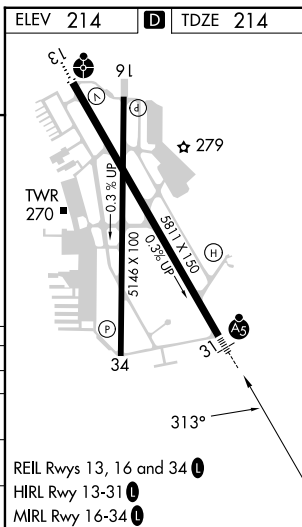

RNAV (GPS) RWY 31