

LOC/DME I-BNT	APP CRS	Rwy Ldg TDZE	9596
111.5	169°	4222	
Chan 52		Apt Elev	4231

ILS or LOC RWY 17

SALT LAKE CITY INTL (SLC)

From WEBER, EKKHO: RNAV 1-GPS required.


DME or RADAR required.

Simultaneous approach authorized. For inop ALS, increase S-ILS 17 Cat E visibility to RVR 4000, increase S-LOC 17 Cat C/D/E visibility to 1% SM.

MALSR

MISSED APPROACH: Climb to 10000 on FFU R-342 to FFU VORTAC and hold.

D-ATIS	SALT LAKE CITY APP CON	SALT LAKE CITY TOWER	GND CON	CLNC DEL	CPDLC
124.75 125.625	125.7 284.6	118.3 257.8	121.9 348.6	127.3 379.975	

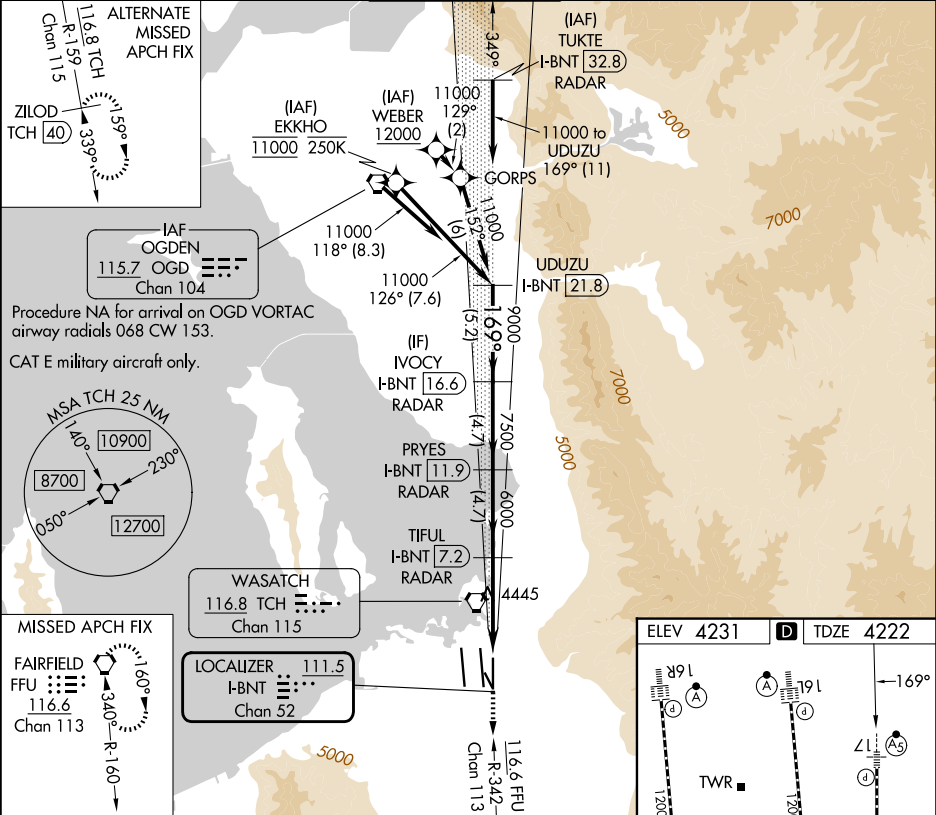

UDUZU I-BNT 21.8	IVOCY I-BNT 16.6	PRYES I-BNT 11.9	TIFUL I-BNT 7.2	FFU 10000	FFU
GS 3.00° TCH 55				FFU R-342	
5.2 NM	4.7 NM	4.7 NM	4.1 NM	1.3	
CATEGORY	A	B	C	D	E
S-ILS 17	4422/18 200 (200-½)				
S-LOC 17	4700/24	478 (500-½)	4700/50	478 (500-1)	

ELEV 4231

D

TDZE 4222

TWR

34L

34R

35L

35R

36L

36R

37L

37R

38L

38R

39L

39R

40L

40R

41L

41R

42L

42R

43L

43R

44L

44R

45L

45R

46L

46R

47L

47R

48L

48R

49L

49R

50L

50R

51L

51R

52L

52R

53L

53R

54L

54R

55L

55R

56L

56R

57L

57R

58L

58R

59L

59R

60L

60R

61L

61R

62L

62R

63L

63R

64L

64R

65L

65R

66L

66R

67L

67R

68L

68R

69L

69R

70L

70R

71L

71R

72L

72R

73L

73R

74L

74R

75L

75R

76L

76R

77L

77R

78L

78R

79L

79R

80L

80R

81L

81R

82L

82R

83L

83R

84L

84R

85L

85R

86L

86R

87L

87R

88L

88R

89L

89R

90L

90R

91L

91R

92L

92R

93L

93R

94L

94R

95L

95R

96L

96R

97L

97R

98L

98R

99L

99R

100L

100R

HIRL all Rwy's

TDZ/CL Rwy's 16L, 16R, 17, 34L, 34R and 35

FAF to MAP 5.4 NM

Knots	60	90	120	150	180
Min:Sec	5:24	3:36	2:42	2:10	1:48