

APP CRS 217°	Rwy Ldg TDZE Apt Elev	8505 770 809
------------------------	-----------------------------	---





RNAV (RNP) Z RWY 22
SAN ANTONIO INTL (SAT)

RNP AR APCH - GPS. Authorization required.
From BRSQT: Min RNP 0.50. From NADDE: RF.


MISSED APPROACH: (Do not exceed 195K until IMIKE) Climb to 3100 direct IMIKE and on track 137° to EMBOW and hold.

T For uncompensated Baro-VNAV systems, procedure NA below -5°C or above 54°C.

D-ATIS 118.9	SAN ANTONIO APP CON 125.1 307.0	SAN ANTONIO TOWER 119.8 257.8	GND CON 121.9 348.6	CLNC DEL 126.7	CPDLC
------------------------	---	---	-------------------------------	--------------------------	-------

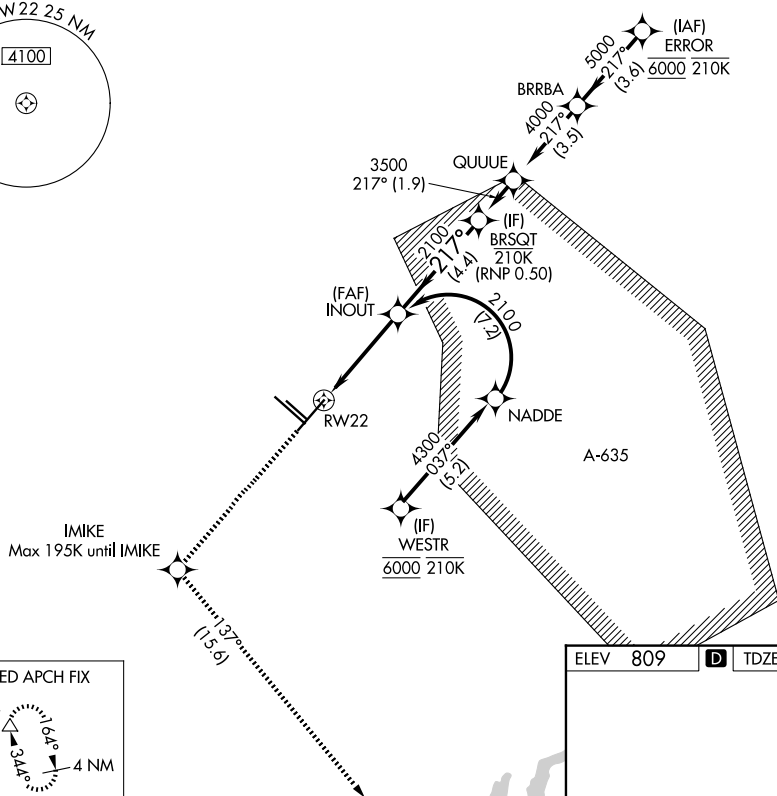


VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 85).

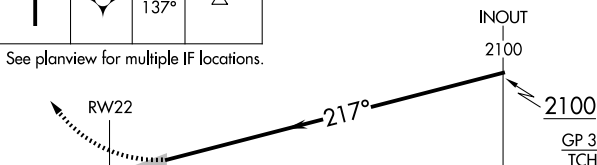

CATEGORY	A	B	C	D
RNP 0.15 DA		1068- $\frac{7}{8}$	298 (300- $\frac{7}{8}$)	
RNP 0.30 DA		1220- $\frac{13}{8}$	450 (500- $\frac{13}{8}$)	

AUTHORIZATION REQUIRED

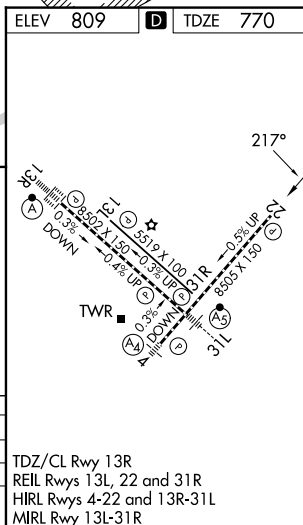

TDZ/CL Rwy 13R
REIL Rwy 13L, 22 and 31R
HIRL Rwy 4-22 and 13R-31L
MIRL Rwy 13L-31R