

SAN ANTONIO, TEXAS

|                          |                  |                              |                      |
|--------------------------|------------------|------------------------------|----------------------|
| WAAS<br>CH 52296<br>W16A | APCH CRS<br>158° | Rwy ldg<br>TDZE<br>Arpt Elev | 11,550<br>690<br>690 |
|--------------------------|------------------|------------------------------|----------------------|

(USAF)

RNAV (GPS) RWY 16


KELLY FLD (KSKF)

|                                                                                                                                                                                                                             |        |                                                                                        |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|----------------------------------------------------------------------------------------|
| RNP APCH                                                                                                                                                                                                                    | ALSF-1 | MISSED APPROACH: Climb to 1500 then climbing right turn to 3000 direct FITER and hold. |
| * When ALS inop, increase RVR to 40, vis to 3/4 miles.<br>** When ALS inop, increase RVR to 55, vis to 1 mile.<br>*** When ALS inop, increase CAT AB RVR to 55, and vis to 1 mile;<br>CAT CDE RVR to 60 vis to 1 1/8 miles. |        |                                                                                        |

|                      |                                     |                             |                        |
|----------------------|-------------------------------------|-----------------------------|------------------------|
| ATIS<br>120.45 273.5 | SAN ANTONIO APP CON<br>118.05 353.5 | KELLY TOWER<br>124.3 322.35 | GND CON<br>121.8 289.4 |
|----------------------|-------------------------------------|-----------------------------|------------------------|

\*\*\*\* Circling not authorized  
E of Rwy 16-34.

For uncompensated  
BARO-VNAV systems,  
LNAV/VNAV NA below -16°C  
(3°F) or above 54°C (129°F).

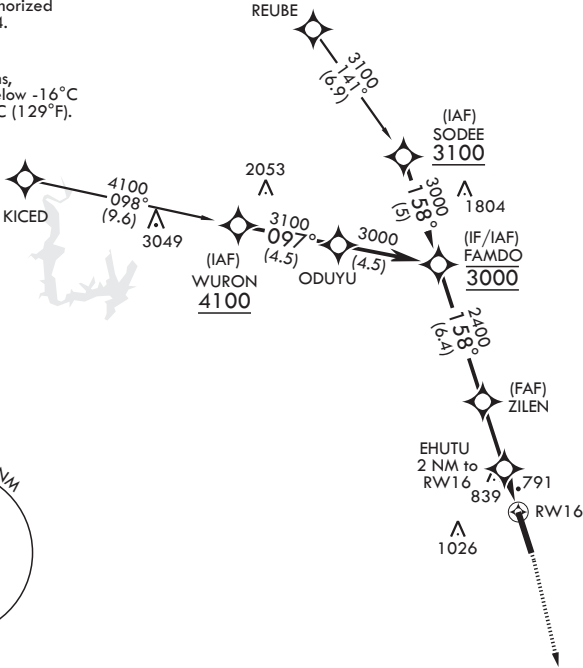

EMERG SAFE ALT 100 NM 4200

|                |                          |                                                                  |                            |                         |              |       |          |      |          |
|----------------|--------------------------|------------------------------------------------------------------|----------------------------|-------------------------|--------------|-------|----------|------|----------|
| FAMD0          |                          | VGSI and descent angles not coincident (VGSI Angle 3.01/TCH 89). |                            | 1500                    | 3000         | FITER | ELEV 690 | 158° | TDZE 690 |
| 3000           | 158°                     | ZILEN                                                            | EHUTU 2 NM to RW16         | 1360                    | 1 NM to RW16 | RW16  |          |      |          |
| GP 3.00°       | TCH 57                   |                                                                  |                            |                         |              |       |          |      |          |
|                |                          | 3.1 NM                                                           | 2 NM                       |                         |              |       |          |      |          |
| CATEGORY       | A                        | B                                                                | C                          | D                       | E            |       |          |      |          |
| LPV DA*        | 890/24                   |                                                                  | 200                        | (200-½)                 |              |       |          |      |          |
| LNAV/VNAV DA** | 1065/35                  |                                                                  | 375                        | (400-¾)                 |              |       |          |      |          |
| LNAV MDA***    | 1100/24                  | 410 (500-½)                                                      | 1100/40                    | 410                     | (500-¾)      |       |          |      |          |
| CIRCLING****   | 1200-1<br>510<br>(600-1) | 1280-1<br>590<br>(600-1)                                         | 1340-1¼<br>650<br>(700-1¼) | 1900-3<br>1210 (1300-3) |              |       |          |      |          |

HIRL all rwys

SAN ANTONIO, TEXAS

29°23'N - 98°35'W

KELLY FLD (KSKF)

Amdt 3 04SEP25

RNAV (GPS) RWY 16

SC-3, 02 OCT 2025 to 30 OCT 2025

SC-3, 02 OCT 2025 to 30 OCT 2025