


WAAS CH 82527 W27A	APP CRS 275°	Rwy Ldg TDZE Apt Elev	7591 17 17
--	------------------------	-----------------------------	---------------------------------------

RNAV (GPS) Y RWY 27
SAN DIEGO INTL (SAN)

RNP APCH. ▼ ▲ Rwy 27 helicopter visibility reduction below RVR 5000 NA. Straight-in Rwy 27 at night, operational VGSi required, remain on or above VGSi glidepath until threshold. Circling NA north of Rwy 9-27. For inop ALS, increase LNAV Cats C/D visibility to 2 SM. Inop table does not apply to LP Cats A/B and LNAV Cat A.	MALS A4	MISSED APPROACH: Climb to 2500 direct SARGs and hold.
---	------------	---

D-ATIS 134.8	SOCAL APP CON 119.6 363.1(WEST) 124.35 279.625 (EAST)	LINDBERGH TOWER 118.3 338.225	GND CON 123.9	CLNC DEL 125.9	CPDLC
------------------------	---	---	-------------------------	--------------------------	-------

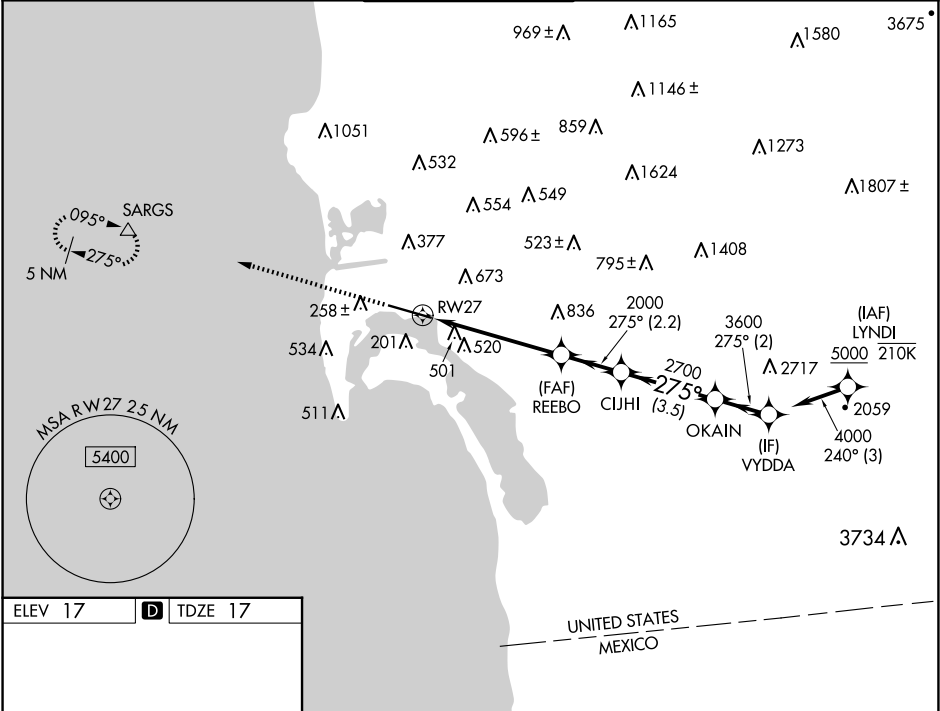

ELEV 17	D	TDZE 17
---------	---	---------

