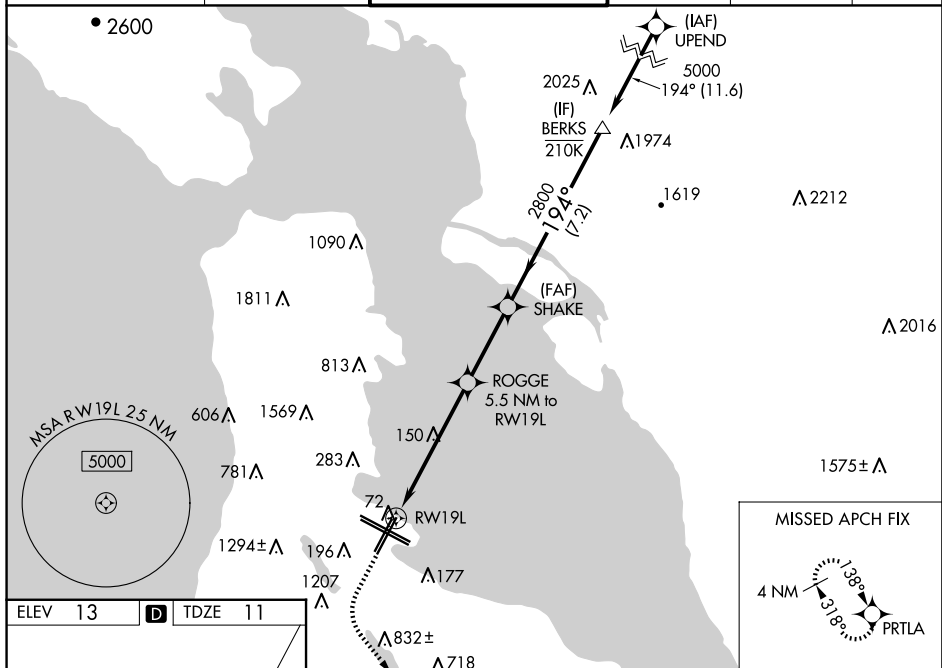


WAAS CH 58015 W19A	APP CRS 194°	Rwy Ldg 8650 TDZE 11 Apt Elev 13
--	------------------------	---

RNAV (GPS) RWY 19L
SAN FRANCISCO INTL (SFO)

RNP APCH - GPS.  For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 4°C or above 54°C. For inop ALS, increase LPV DA* (CG 357) all Cats visibility to RVR 4500. For inop ALS, increase LNAV/VNAV all Cats visibility to 2½ SM and LNAV Cats C and D visibility to 3 SM.	MALSF  	MISSED APPROACH: Climb to 1100 then climbing left turn to 4000 direct PRTLA and hold. *Missed approach requires minimum climb of 357 feet per NM to 2000.
---	--	---

D-ATIS			NORCAL APP CON		SAN FRANCISCO TOWER		GND CON	CLNC DEL	CPDLC
113.7	115.8	118.85	134.5	338.2	120.5	269.1	121.8	118.2	

[illegible]