
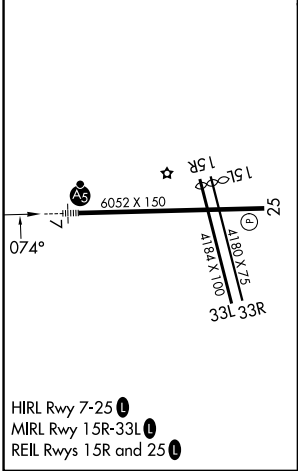


WAAS CH 78306 W07A	APP CRS 074°	Rwy Ldg TDZE Apt Elev	6052 13 14
--	------------------------	-----------------------------	---------------------------------------

RNAV (GPS) RWY 7

SANTA BARBARA MUNI (SBA)

RNP APCH - GPS.		MALSR 	MISSED APPROACH: Climb to 4000 direct CESRA and right turn on track 162° to IYOBE and right turn on track 238° to GOLET and hold, continue climb-in-hold to 4000.		
⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 3°C or above 54°C. ⚠ Circling Rwy 15L/R and 33L/R NA at night. Rwy 7 helicopter visibility reduction below RVR 4000 NA. When local altimeter setting not received, use OXR altimeter setting and increase LPV DA to 392 feet; increase LNAV/VNAV DA to 686 feet and all visibilities ¼ SM. Increase all MDAs 100 feet, and LNAV visibility Cat C and D ½ SM, and Circling visibility Cat A/C ½ SM. VDP and Baro-VNAV NA when using OXR altimeter setting. For inop ALS, increase LPV all Cats visibility to RVR 4500 and LNAV Cat A to RVR 5500 and Cat C/D to 2 ½ SM. For inop ALS when using OXR altimeter setting, increase LPV all Cats visibility to RVR 5500 and LNAV/VNAV all Cats visibility to 1 ½ SM. Circling NA for Cats C and D north of Rwy 7-25.					
ATIS 132.65	SANTA BARBARA APP CON★ 120.55 319.15 (151°-329°) 125.4 291.1 (330°-150°)	SANTA BARBARA TOWER★ 119.7 (CTAF) 0 254.35		GND CON 121.7	UNICOM 122.95

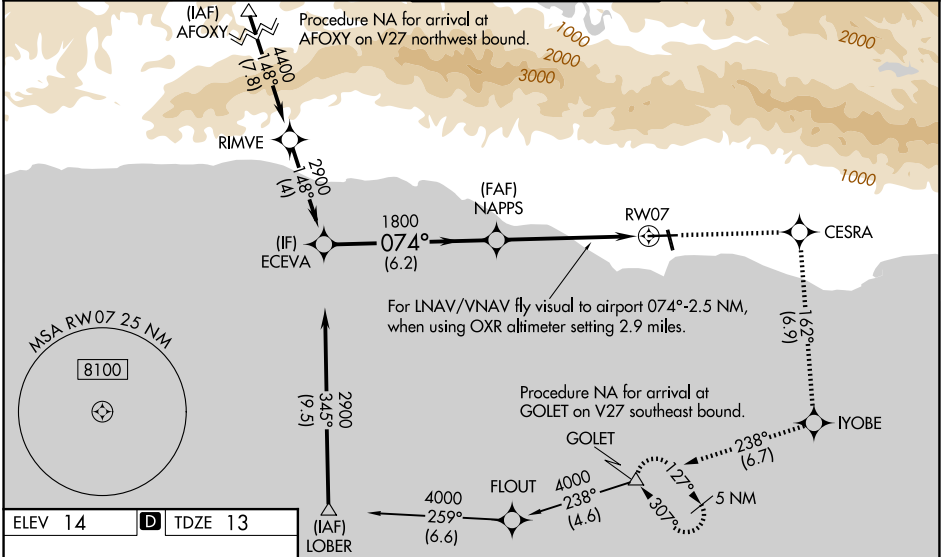

ECEVA		4000 ↑		CESRA ✧		tr 162° ↷		IYOBE ✧		tr 238° ↷		GOLET △	
2900		NAPPS 1800		1800		2.4 NM to RW07		RW07		For LNAV/VNAV fly visual to airport, 074° -2.5 NM, when using OXR altimeter setting 2.9 miles.			
GP 3.00° TCH 52		074°		1800		6.2 NM		3.1 NM		2.4 NM			
CATEGORY		A		B		C		D					
LPV DA		309/40		296 (300-¾)									
LNAV/ VNAV DA		603-1¼		590 (600-1¼)									
LNAV MDA		820/40		807 (900-¾)		820-1⅞		807 (900-1⅞)					
CIRCLING		820-1 806 (900-1)		840-1¼ 826 (900-1¼)		840-2½ 826 (900-2½)		1000-3 986 (1000-3)					

SW-3, 02 OCT 2025 to 30 OCT 2025

SW-3, 02 OCT 2025 to 30 OCT 2025