

WAAS CH 73005 W12A	APP CRS 126°	Rwy Ldg TDZE 3963 Apt Elev 3967
--	------------------------	---

RNAV (GPS) RWY 12

SCOTTSBLUFF/WESTERN NEBRASKA RGNL/WM B HEILIG FLD (BTF)


When local altimeter setting not received, use Alliance altimeter setting and increase all DAs 91 feet and all MDAs 100 feet; increase LPV, LNAV/VNAV, LNAV Cat A/B and Circling Cat B visibilities ¼ mile; increase LNAV and Circling Cat C/D visibilities ½ mile. For inoperative MALSR, when using Alliance altimeter setting, increase LPV all Cats visibility to 1¼, and LNAV Cat A visibility to 1. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -22°C (-7°F) or above 41°C (105°F). Baro-VNAV NA when using Alliance altimeter setting. VDP NA when using Alliance altimeter setting. DME/DME RNP-0.3 NA.



MISSED APPROACH:
Climb to 6700 direct
HAKAB and hold.

ASOS 121.025	DENVER CENTER 127.95 338.2	UNICOM 123.0 (CTAF) 1
------------------------	--------------------------------------	---------------------------------

Procedure NA for arrivals at ALBIN V81 southwest bound and arrivals at SPONS V81-V169 northbound.

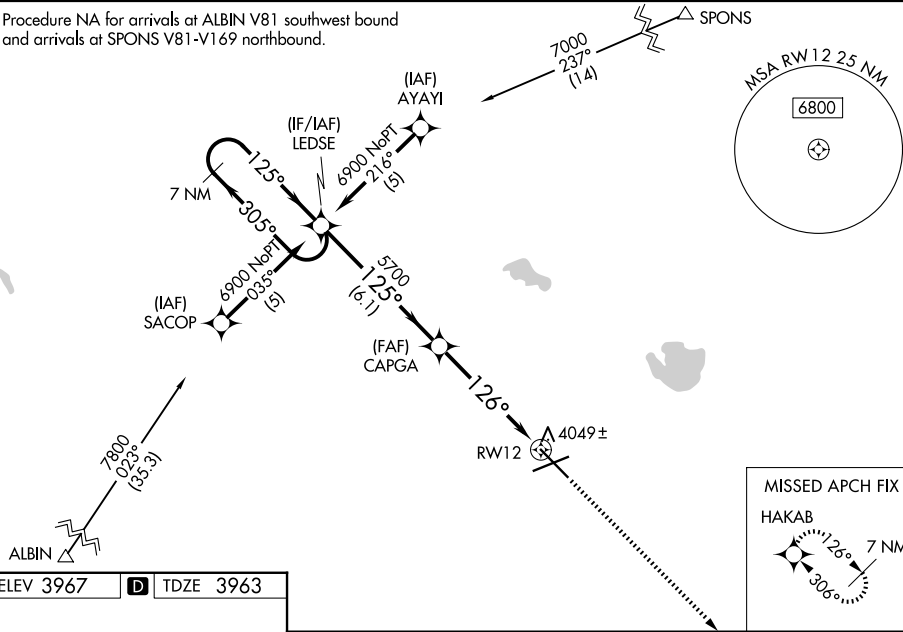

ELEV 3967

D

TDZE 3963

HIRL Rwy 12-30 1

MRL Rwy 5-23 1

7 NM Holding Pattern				LEDSE	6700 HAKAB					
GP 3.00° TCH 57				*LNAV only						
6900				*2.1 NM to RW12						
←305°				RW12						
125°→				6.1 NM						
125°				3.1 NM						
126°				2.1 NM						
5700										
CATEGORY	A	B	C	D						
LPV DA	4213-½ 250 (300-½)									
LNAV/VNAV DA	4340-¾ 377 (400-¾)									
LNAV MDA	4700-½	737 (800-½)	4700-1½	4700-1¾	737 (800-1½)	737 (800-1¾)				
CIRCLING	4700-1	733 (800-1)	4700-2	4740-2½	733 (800-2)	773 (800-2½)				