

APP CRS	Rwy Ldg	9013
280°	TDZE	413
	Apt Elev	421

RNAV (RNP) Y RWY 28

SYRACUSE HANCOCK INTL (SYR)

RNP AR APCH.

T For uncompensated Baro-VNAV systems, procedure NA below -18°C or above 54°C. For inop ALS, increase RNP 0.15 all Cats visibility to 1%. For inop ALS, increase RNP 0.30 all Cats visibility to 1%.

ALSF-2



MISSED APPROACH: Climb to 3000 on track 280° to MOYIK and on track 306° to WIFFY and hold.

ATIS
124.225


SYRACUSE APP CON
126.125 269.125

SYRACUSE TOWER
120.3 239.0


GND CON
121.7 348.6

MISSED APCH FIX


6 NM



Procedure NA for arrivals at
SYR VORTAC on V29 southbound.

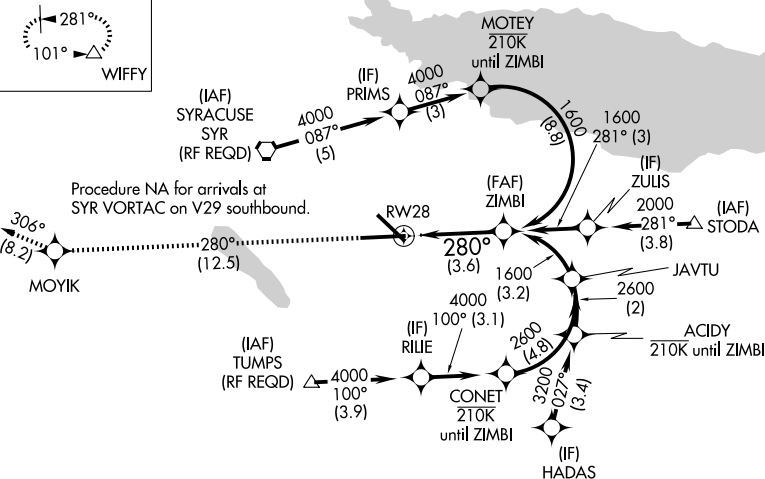


ELEV 421	D	TDZE 413
----------	----------	----------



TDZ/CL Rwy 28
HIRL Rwy 10-28 and 15-33

MSA R W 20 23 NM



3000 ↑ tr 280°	MOYIK 	tr 306°	WIFFY 
----------------------	--	------------	--

See planview for multiple IF locations.

ZIMBI
|
1 600

GP 3.00°
TCH 78

CATEGORY	A	B	C	D
RNP 0.15 DA		862/55	449 (500-1)	
RNP 0.30 DA		957-1 ³ / ₈	544 (600-1 ³ / ₈)	

AUTHORIZATION REQUIRED