



VORTAC ACT	APP CRS	Rwy Ldg	5103
<u>115.3</u>	321°	TDZE	516
Chan 100		Apt Elev	516

VOR/DME RWY 32
WACO RGNL (ACT)


V VDP NA with Mc Gregor Exec altimeter setting. When local altimeter setting
A not received use Mc Gregor Exec altimeter setting and increase all MDA 40
feet; increase S-32 Cats C/D visibility $\frac{1}{8}$ mile and Circling Cat D visibility $\frac{1}{4}$ mile.
ASR

MISSED APPROACH: Climb to 3000 direct ACT VORTAC and hold, continue climb-in-hold to 3000.

ATIS 123.85	WACO APP CON ★ 127.65 227.125	WACO TOWER ★ 119.3 (CTAF) 0 257.8	GND CON 121.9	UNICOM 122.95
-----------------------	---	---	-------------------------	-------------------------

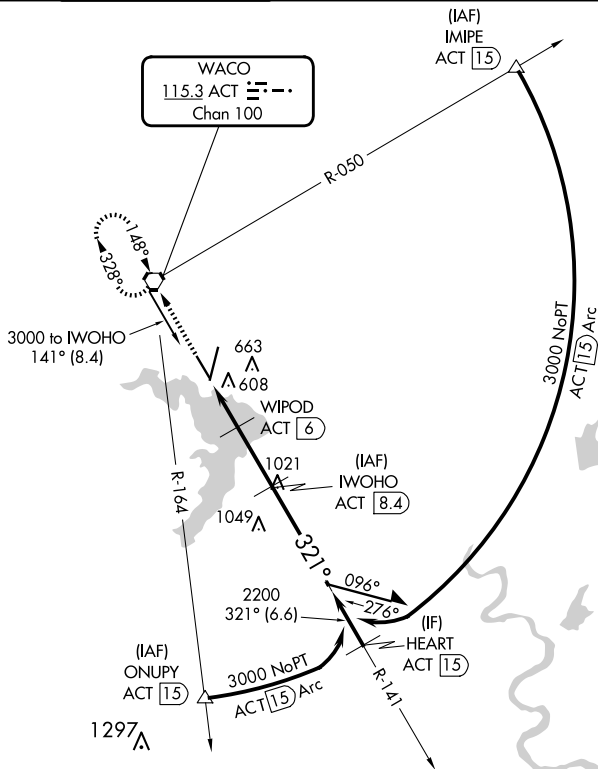

ELEV 516	D	TDZE 516
----------	----------	----------

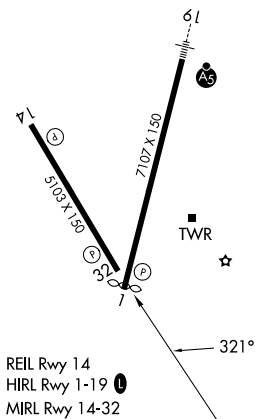

3000
↑
ACT
WFOH
ACT 8.4
Remain within 10 NM
WIPOD
ACT 6
ACT 4.9
ACT 4
1300
3.42°
TCH 61
2200
321°
141°
3000
VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 58).
0.9 1.1 NM 2.4 NM
CATEGORY A B C D
S-32 860-1 344 (400-1)
CIRCLING 940-1 424 (500-1) 980-1 464 (500-1) 1020-1 1/2 504 (600-1 1/2) 1160-2 644 (700-2)