

APP CRS	Rwy Ldg	7604
274°	TDZE	1068
	Apt Elev	1099

RNAV (RNP) Z RWY 27

YAKIMA AIR TRML/MCALLISTER FLD (YKM)


For uncompensated Baro-VNAV systems, procedure NA below -17°C (2°F) or above 54°C (130°F). RF required. GPS required. Missed approach requires RNP less than 1.0. For inop ALS increase *RNP 0.10 DA visibility all Cts to RVR 4500 and RNP 0.30 DA visibility all Cts to 1 1/2 SM. DATVE transition NA when R-6714 A, C, D active.

MALSRS




MISSED APPROACH: Climb to 5100 on track 274° to YEPCU left turn to JOPDI left turn to ZEMUN left turn to MUDLE and hold.
* Missed approach requires a minimum climb of 215 feet per NM to 4300.

ATIS	SPOKANE APP CON *	YAKIMA TOWER *	GND CON	UNICOM
125.25	123.8 263.15	133.25 (CTAF) 0 257.8	121.9	122.95

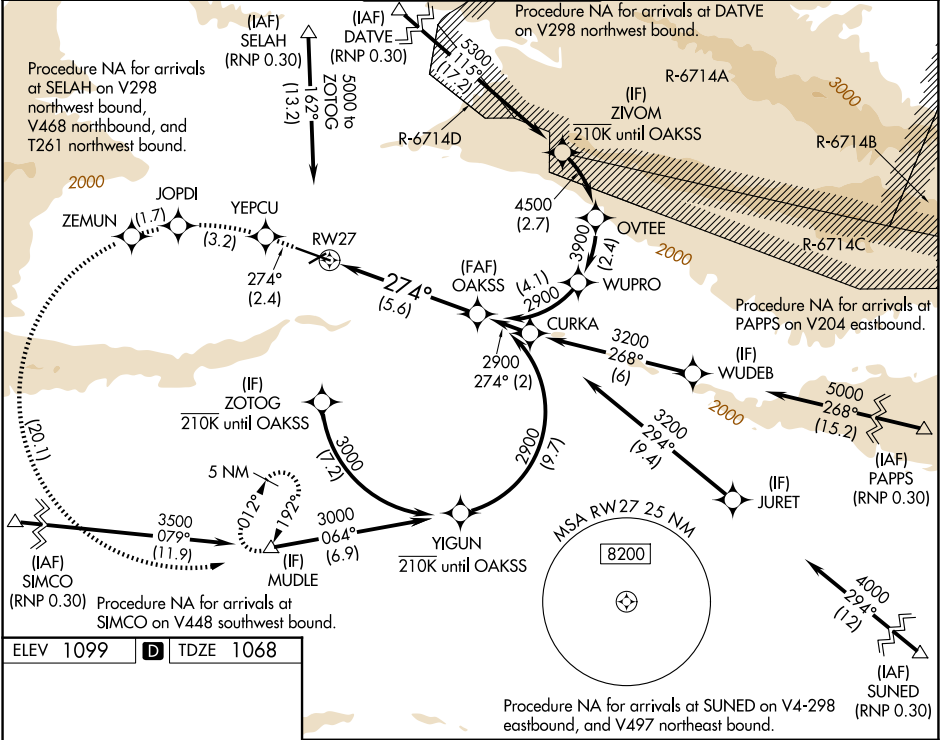


ELEV 1099 D TDZE 1068



5100	YEPCU	JOPDI	ZEMUN	MUDLE	OAKSS
tr 274°					2900

See planview for multiple IF locations.



GP 3.00° TCH 57

CATEGORY	A	B	C	D
RNP 0.10 DA*	1348/24 280 (300-1/2)			
RNP 0.30 DA	1468/45 400 (400-7/8)			

AUTHORIZATION REQUIRED