


TOP ALTITUDE: ASSIGNED BY ATC	RNAV 1 - DME/DME/IRU or GPS.
	RADAR required
	RADAR required for non-GPS equipped aircraft.

LIDDS FOUR DEPARTURE (RNAV)

(LIDDS4.LIDDS) 17APR25

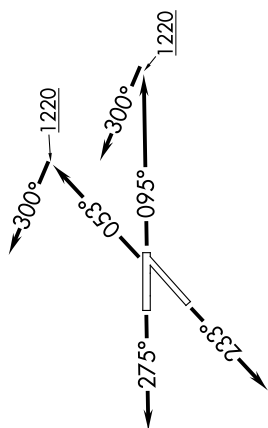

NOTE: Turbojet departures at/above 10000, maintain 280K until advised by ATC.

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAY 5: Climb on heading 053° to 1220, then on heading 300° or as assigned by ATC, for RADAR vectors to cross KZIOV at or below 15000, thence....
 TAKEOFF RUNWAY 9: Climb on heading 095° to 1220, then on heading 300° or as assigned by ATC, for RADAR vectors to cross KZIOV at or above 15000, thence....
 TAKEOFF RUNWAY 23: Climb on heading 233° or as assigned by ATC, for RADAR vectors to cross KZIOV at or above 15000, thence....
 TAKEOFF RUNWAY 27: Climb on heading 275° or as assigned by ATC, for RADAR vectors to cross KZIOV at or above 15000, thence....

.....on track 111° to UDDS, then on (transition). Maintain ATC assigned altitude, expect filed altitude 10 minutes after departure.

GRIVY TRANSITION (LIDDS4.GRIVY):

DETROIT, MICHIGAN

WILLOW RUN (YIP)


DETROIT DEP CON
118.95 284.0
ATIS
127.425
GND CON
119.975
WILLOW RUN TOWER
125.275 256.9

TAKEOFF MINIMUMS:

Rwy 23: Standard.

Rwys 5, 9: Standard with minimum climb of 500' per NM to 1220.

Rwy 27: Standard with minimum climb of 209' per NM to 1000.

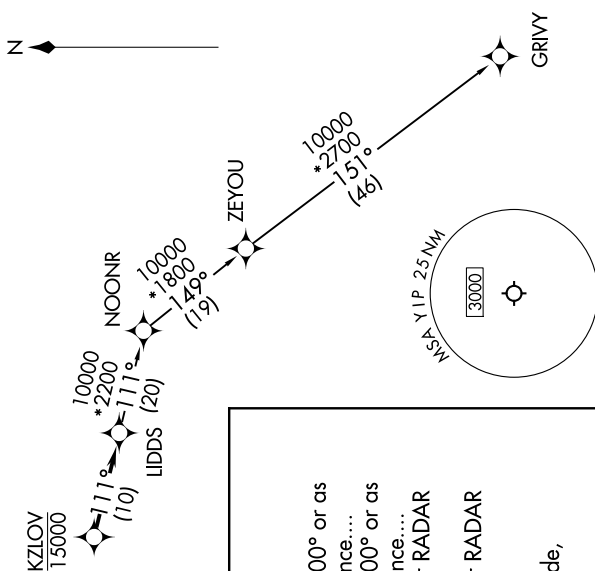

NOTE: Chart not to scale.