

WAAS CH 81813 W31A	APP CRS 309°	Rwy Idg 5997 TDZE 174 Apt Elev 178
--	------------------------	---

RNAV (GPS) RWY 31
ALICE INTL (ALI)

RNP APCH - GPS.

Baro-VNAV and VDP NA when using Nueces County altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. When local altimeter setting not received, use Nueces County altimeter setting: increase LPV DA to 494 feet, LNAV/VNAV DA to 524 feet; increase all MDA 60 feet and LNAV Cat C and D, and Circling Cat D visibility ¼ SM. For inop ALS, increase all LPV and LNAV/VNAV visibilities to ¾ SM. For inop ALS with Nueces County altimeter setting, increase all LPV visibilities to ¾ SM and LNAV Cat C and D visibility to 1½ SM.


MALS




MISSED APPROACH:
Climb to 2100 direct
UWAGO and hold.

ASOS 119,225	KINGSVILLE APP CON ★ 119.9 290.45	UNICOM 123.0 (CTAF) 0
------------------------	---	---------------------------------



MISSED APCH FIX



Procedure NA for arrivals at CRP VORTAC
on airway radials 169 CW 305.

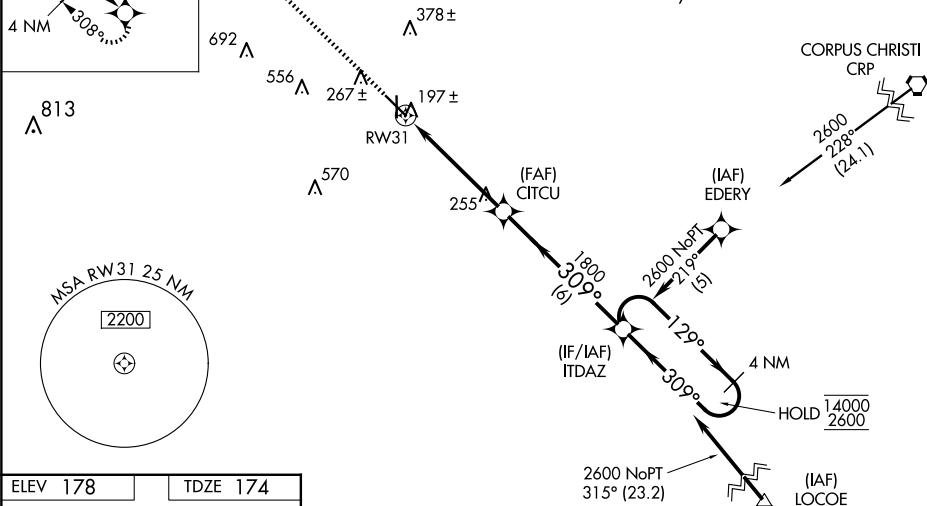

ELEV 178		TDZE 174
----------	--	----------

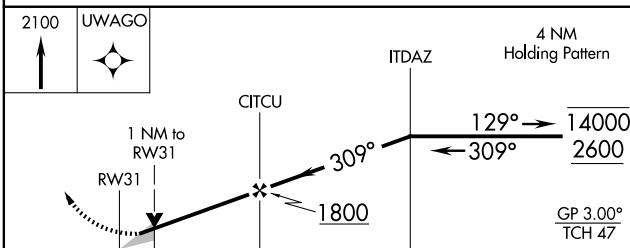

CATEGORY		A	B	C	D
LPV	DA	437- ³ / ₄ 263 (300- ³ / ₄)			
LNAV/ VNAV	DA	467- ³ / ₄ 293 (300- ³ / ₄)			
LNAV	MDA	520- ³ / ₄ 346 (400- ³ / ₄)			
CIRCLING		600-1 422 (500-1)	640-1 462 (500-1)	700-1½ 522 (600-1½)	900-2¼ 722 (800-2¼)