


25219

RNAV (GPS) RWY 4
TUSCALOOSA NTL (TCL)



T Circling Rwy 12, 30 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -7°C or above 54°C. For inop ALS, **A** increase LNAV/VNAV all Cats visibility to 1½ SM.




MISSED APPROACH: Climb to 2500 direct NENMY and on track 125° to OKW VORTAC and hold.

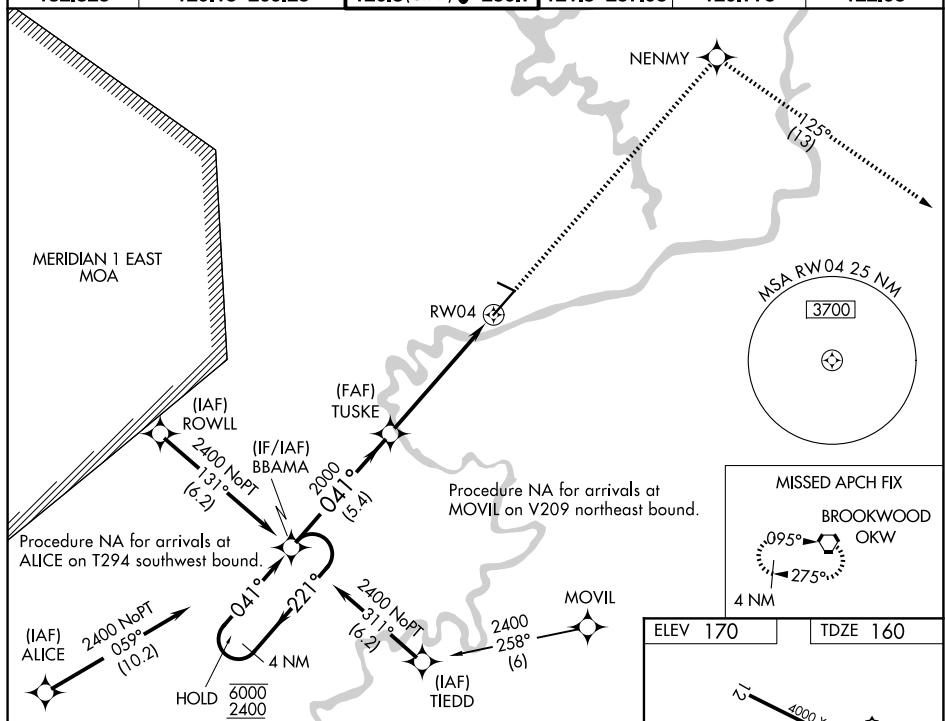UNICOM
122.95

4 NM
Holding Pattern BBAMA

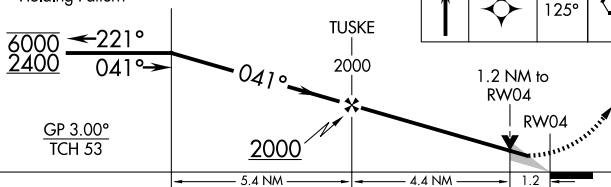

CATEGORY	A	B	C	D
LPV DA		360-1/2	200 (200-1/2)	
LNAV/ VNAV DA		575-3/4	415 (500-3/4)	
LNAV MDA	600-1/2	440 (500-1/2)	600-3/4	440 (500-3/4)
CIRCLING	720-1 550 (600-1)	800-1 630 (700-1)	960-2 1/4 790 (800-2 1/4)	960-2 1/2 790 (800-2 1/2)

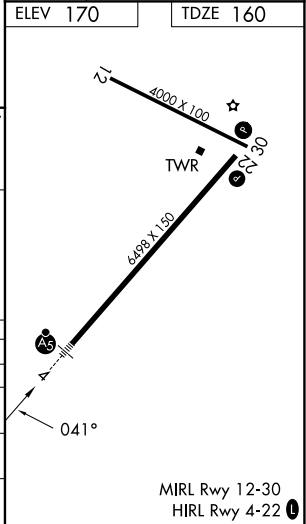

TUSCALOOSA NTL (TCL)
RNAV (GPS) RWY 4

SE-4, 02 OCT 2025 to 30 OCT 2025

SE-4, 02 OCT 2025 to 30 OCT 2025