MAYNR THREE DEPARTURE (RNAV)

TOP ALTITUDE: ASSIGNED BY ATC

RNAV 1 - DME/DME/IRU or GPS.
From SLIPT to MAXIM: RNAV 1 - GPS.
From SLIPT to CANOA: RNAV 1 - GPS.

RADAR required for non-GPS equipped aircraft.
RADAR required.

TAKEOFF MINIMUMS
Rwy 6: Standard with minimum climb of 500'/NM to 1800.
Rwy 24: Standard with minimum climb of 500'/NM to 2200.

NOTE: Jet aircraft only.
NOTE: Accelerate to 250K until leaving 10000, if unable, advise ATC.

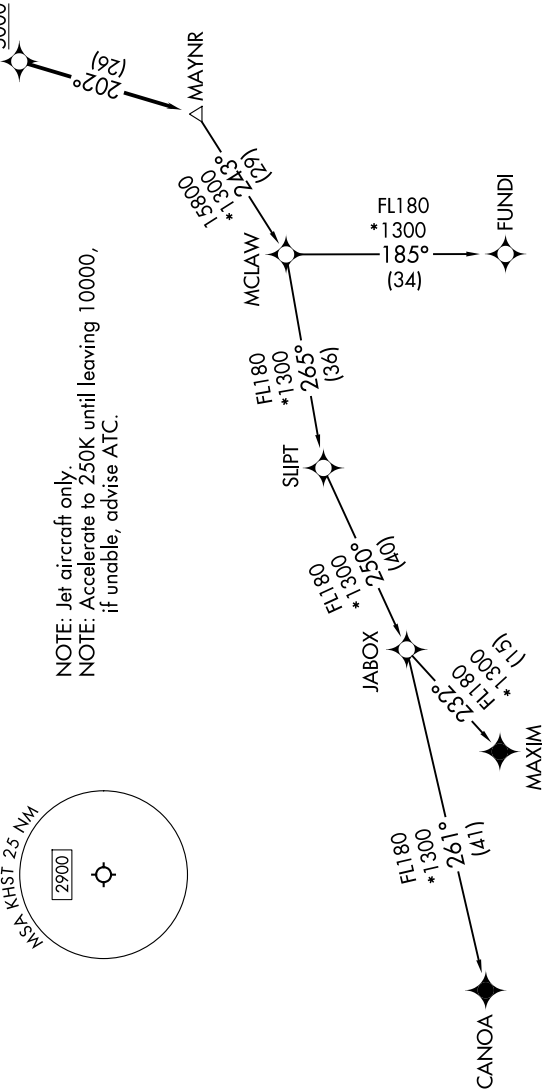

MIAMI DEP CON
125.5 354.1
ATIS★
132.275 269.9
CLNC DEL
121.75 275.8
GND CON
121.75 275.8
HOMESTEAD TOWER
133.45 279.55

(CONTINUED ON FOLLOWING PAGE)

NOTE: Chart not to scale.

SE-3, 02 OCT 2025 to 30 OCT 2025

MAYNR THREE DEPARTURE (RNAV)

HOMESTEAD, FLORIDA
HOMESTEAD ARB (KHST)