

WAAS CH 90405 W22A	APP CRS 219°	Rwy Ldg 5000 TDZE 2880 Apt Elev 2885
--	------------------------	---


RNAV (GPS) RWY 22
LIBERAL MID-AMERICA RGNL (LBL)

RNP APCH - GPS.


T Circling NA east of Rwy 17-35. Baro-VNAV and VDP NA when using GUY
A altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA
below -20°C or above 54°C. When local altimeter setting not received, use
GUY altimeter setting and increase LPV DA to 3192 feet; Increase LNAV/VNAV
DA to 3280 feet and all visibilities ½ SM. Increase all MDAs 120 feet and LNAV
visibility Cat C/D ¾ SM, and Circling visibility Cat C/D ½ SM.

MISSED APPROACH: Climb to 4800 direct PERDE and hold.

AWOS-3PT 118.375	KANSAS CITY CENTER 134.0 257.625	UNICOM 122.8 (CTAF) 0
----------------------------	--	---------------------------------

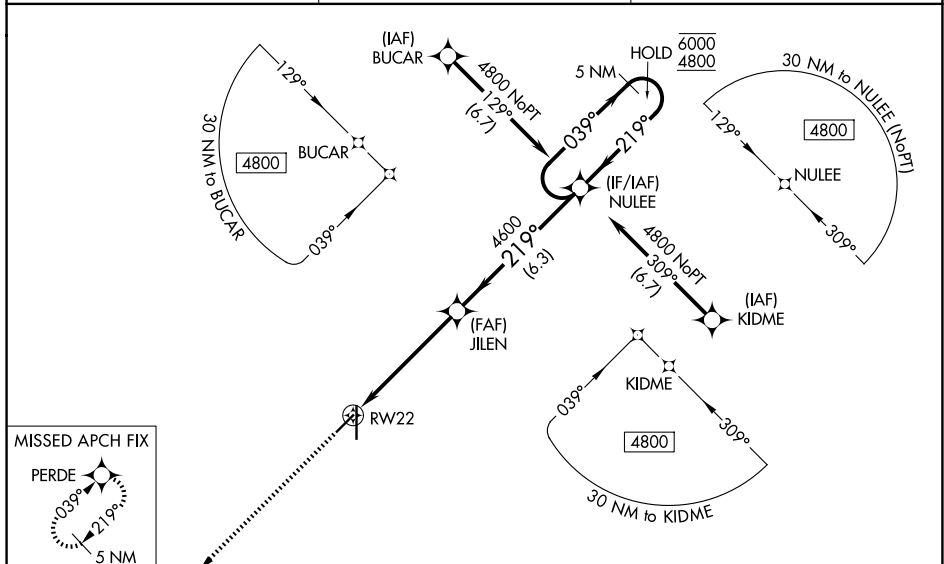

ELEV 2885	D	TDZE 2880
-----------	----------	-----------

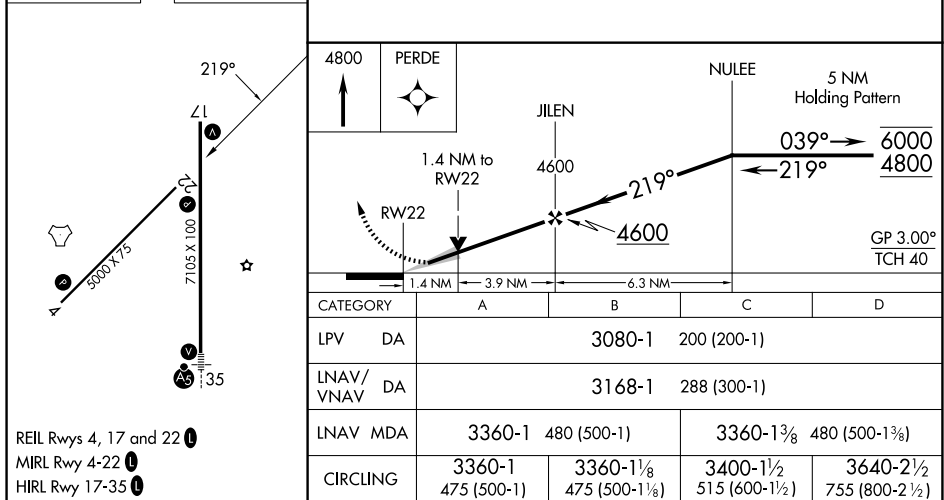

CATEGORY		A	B	C	D
LPV	DA	3080-1 200 (200-1)			
LNAV/ VNAV	DA	3168-1 288 (300-1)			
LNAV	MDA	3360-1 480 (500-1)	3360-1 $\frac{3}{8}$ 480 (500-1 $\frac{3}{8}$)		
CIRCLING		3360-1 475 (500-1)	3360-1 $\frac{1}{8}$ 475 (500-1 $\frac{1}{8}$)	3400-1 $\frac{1}{2}$ 515 (600-1 $\frac{1}{2}$)	3640-2 $\frac{1}{2}$ 755 (800-2 $\frac{1}{2}$)