
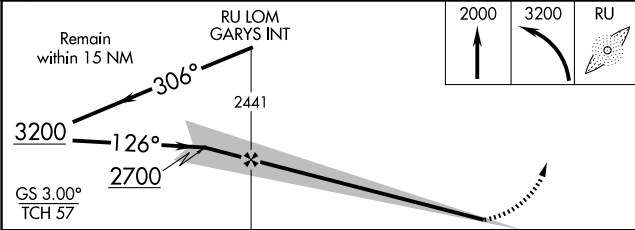


LOC I-RUM	APP CRS	Rwy Idg	5601
108.7	126°	TDZE	593
		Apt Elev	595


ILS or LOC RWY 13
SAN MARCOS RGNL (HYI)

ADF required.	MALS	MISSED APPROACH: Climb to 2000 then climbing left turn to 3200 direct GARYS LOM/INT and hold.
NA Circling NA for Cat E southwest of Rwy 13-31. Inop table does not apply to S-ILS 13 all Cats. For inop ALS, increase S-LOC 13 Cat C/D/E visibility to 1 1/8 SM.	A	

ATIS 120.825	AUSTIN APP CON 119.0 370.85	SAN MARCOS TOWER ★ 126.825 (CTAF) 0	GND CON 120.125	CLNC DEL 120.125	CLNC DEL 121.35 (when twr closed)
-----------------	--------------------------------	--	--------------------	---------------------	---

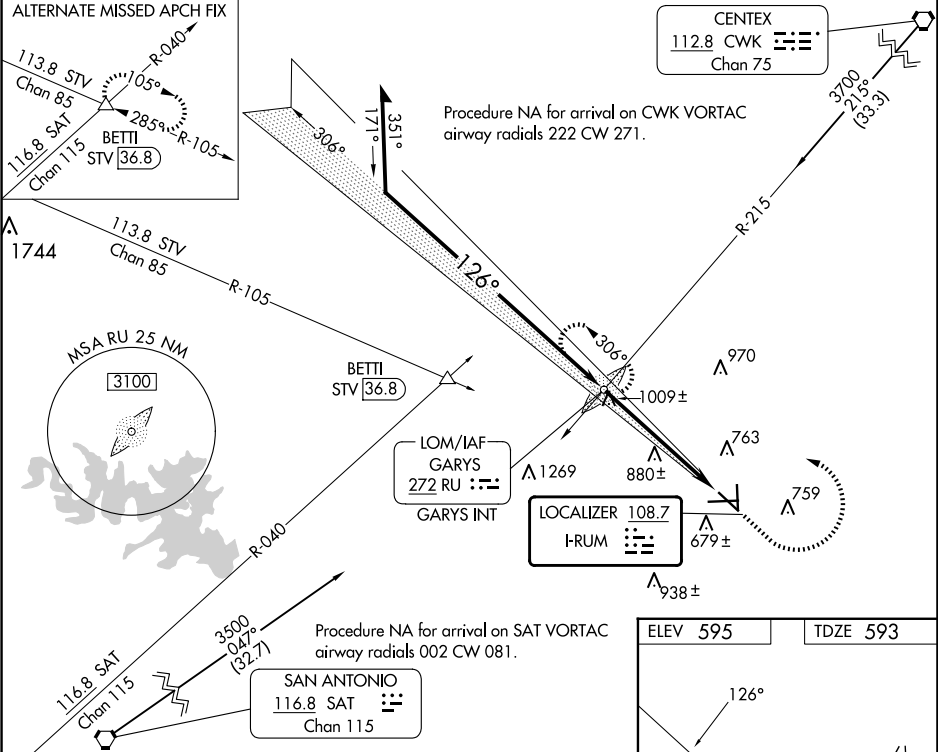

CATEGORY	A	B	C	D	E
S-ILS-13		793-3/4	200 (200-3/4)		
S-LOC-13	1260-3/4	667 (700-3/4)	1260-1 3/4	667 (700-1 3/4)	
CIRCLING	1260-1	665 (700-1)	1260-1 7/8	1320-2 1/4	1340-2 3/4
			665 (700-1 7/8)	725 (800-2 1/4)	745 (800-2 3/4)

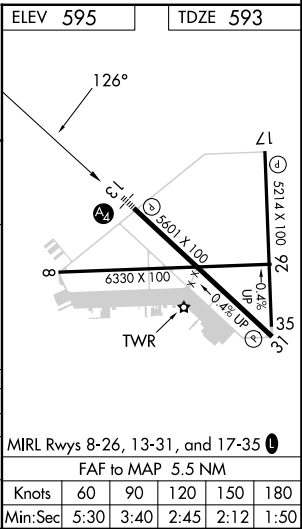

SC-3, 02 OCT 2025 to 30 OCT 2025

SC-3, 02 OCT 2025 to 30 OCT 2025