

WAAS CH 90523 W21A	APP CRS 208°	Rwy Idg TDZE Apt Elev	5500 3286 3298
--	------------------------	-----------------------------	---


RNAV (GPS) RWY 21
CHADRON MUNI (CDR)

	RNP APCH-GPS.
--	---------------


V Baro-VNAV NA when using Pine Ridge altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C or above 54°C. VDP NA with Pine Ridge altimeter setting. When local altimeter setting not received, use Pine Ridge altimeter setting and increase LPV DA to 3606 feet, LNAV/VNAV DA to 3754 feet and all MDA 80 feet; increase LNAV/VNAV visibility $\frac{1}{4}$ SM all Cats, LNAV Cats C and D visibility $\frac{1}{4}$ SM, and Circling Cat C visibility $\frac{1}{4}$ SM.

MISSED APPROACH: Climb to 7500 direct HADIR and hold, continue climb-in-hold to 7500.

ASOS 118.05	DENVER CENTER 127.95 338.2	UNICOM 122.8 (CTAF) 0
-----------------------	--------------------------------------	---------------------------------

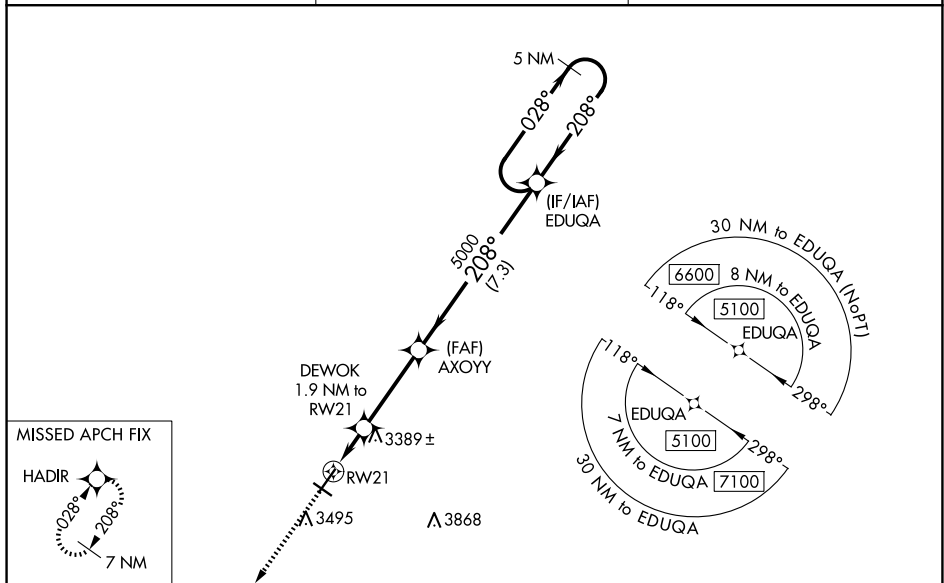

ELEV 3298	D	TDZE 3286
-----------	----------	-----------

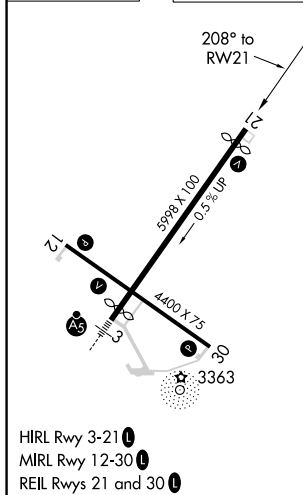

Λ 4392					
7500 ↑		HADIR 		5 NM Holding Pattern EDUQA	
RNAV only		DEWOK 1.9 NM to RW21 AXOYY 5000 5000 208° 028° → 5100 ← 208° GP 3.00° TCH 41 3900 1 NM 0.9 NM 3.4 NM 7.3 NM			
CATEGORY		A	B	C	D
LPV	DA	3536-1 250 (300-1)			
LNAV/VNAV	DA	3684-1½ 398 (400-1½)			
LNAV	MDA	3640-1 354 (400-1)			
CIRCLING		3820-1 522 (600-1)	3920-1 622 (700-1)	3920-1¼ 622 (700-1¼)	4220-3 922 (1000-3)