



ILS or LOC RWY 13

LOC I-OVI 110.35	APCH CRS 128°	Rwy Idg 8194 TDZE 4294 Arpt Elev 4295	[USAF]	CANNON AFB (KCVS)
RADAR or DME required. Missed approach requires use of RNAV or RADAR monitoring.			SSALR (A3)	MISSED APPROACH: Climb to 6000 out CVS TACAN R-1305.6 DME (HOMEP) then climbing right turn to 7000 intercept CVS R-193 to 12 DME (CLINK) and hold.
* When ALS inop, increase vis to ¾ mile. ** When ALS inop, increase CAT AB vis to 1 mile; CAT CDE vis to 1¾ miles.				
ATIS 119.1 269.9	CANNON APP CON 118.425 352.1	CANNON TOWER 120.4 270.25	GND CON 121.9 275.8	CLNC DEL 120.2 293.225

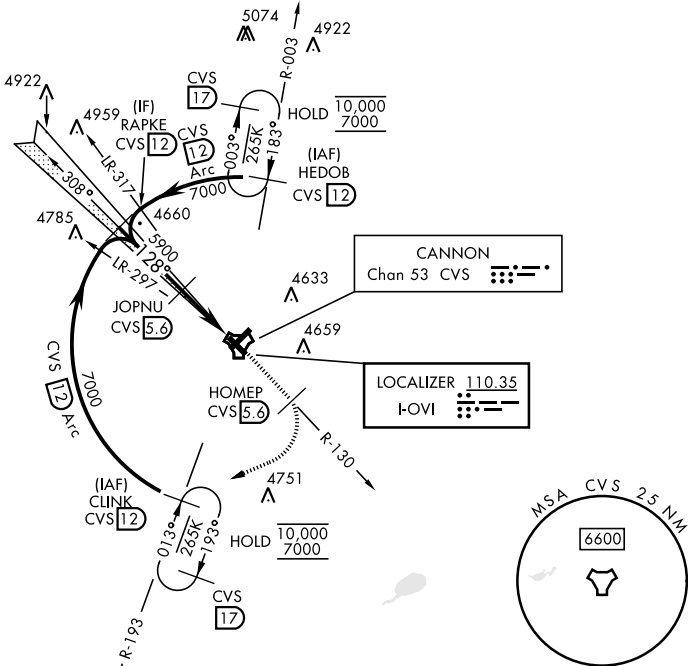

EMERG SAFE ALT 100 NM 8000

RAPKE CVS 12		VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 37).		6000 CVS R-130	HOMEP CVS 5.6	7000	CLINK CVS 12
7000		128°		JOPNU CVS 5.6		CVS 2	
GS 3.00° TCH 45		5900		4.9 NM			
CATEGORY	A	B	C	D	E		
S-ILS 13 *	4544-½		250	(300-½)			
S-LOC 13 **	4760-½ 466 (500-½)		4760-1 466 (500-1)				
CIRCLING	4840-1 545 (600-1)		4860-1½ 565(600-1½)	5000-2¼ 705(800-2¼)	5020-2½ 725(800-2½)		

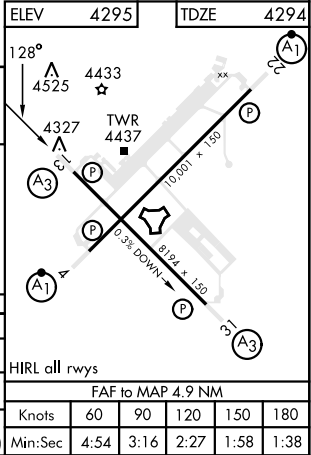

ILS or LOC RWY 13

SW-1, 02 OCT 2025 to 30 OCT 2025

SW-1, 02 OCT 2025 to 30 OCT 2025