

|                                        |                        |                                                   |
|----------------------------------------|------------------------|---------------------------------------------------|
| WAAS<br>CH <b>42512</b><br><b>W22A</b> | APP CRS<br><b>221°</b> | Rwy Ldg<br>TDZE <b>422</b><br>Apt Elev <b>422</b> |
|----------------------------------------|------------------------|---------------------------------------------------|

RNAV (GPS) RWY 22

EVANSVILLE RGNL (EVV)


ASR

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1.5°C (5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Circling Rwy 9 NA at night.  
\*\* RVR 1800 authorized with the use of FD or AP or HUD to DA.


MALSR

MISSED APPROACH:  
Climb to 2500 direct  
ICINU and hold.

|                      |                                              |                                                 |                         |                          |                         |
|----------------------|----------------------------------------------|-------------------------------------------------|-------------------------|--------------------------|-------------------------|
| ATIS<br><b>120.2</b> | EVANSVILLE APP CON ★<br><b>124.025 290.9</b> | EVANSVILLE TOWER ★<br><b>118.7 (CTAF) 257.8</b> | GND CON<br><b>121.9</b> | CLNC DEL<br><b>126.6</b> | UNICOM<br><b>122.95</b> |
|----------------------|----------------------------------------------|-------------------------------------------------|-------------------------|--------------------------|-------------------------|

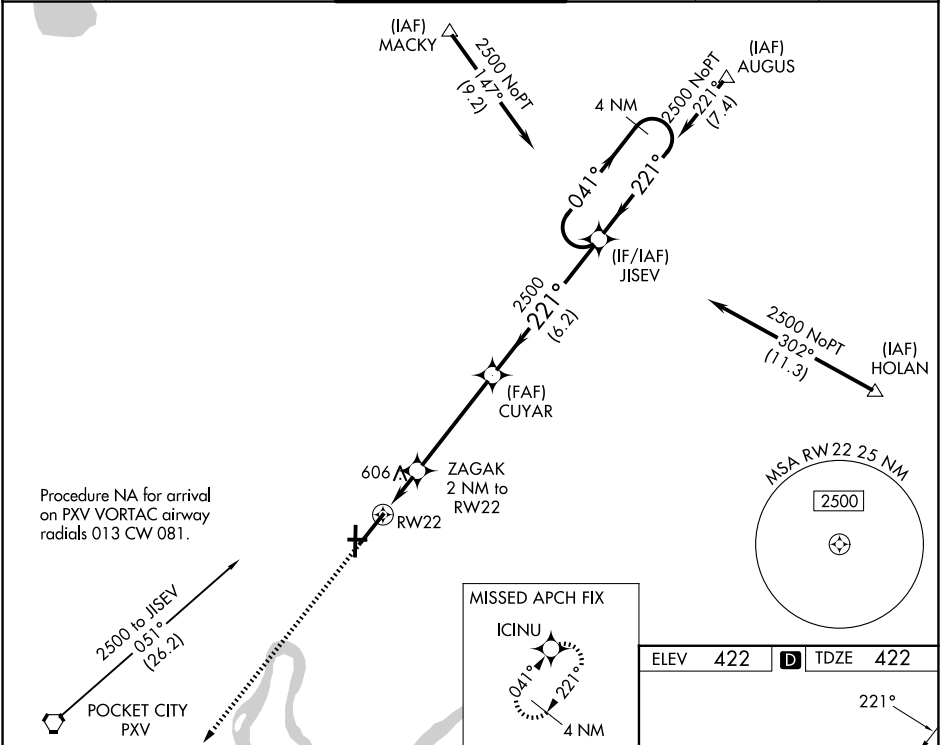

|              |                      |                       |                         |                       |                      |
|--------------|----------------------|-----------------------|-------------------------|-----------------------|----------------------|
| 2500         | ICINU                | ZAGAK 2 NM to RW22    | CUYAR 2500              | JISEV                 | 4 NM Holding Pattern |
| *LNAV only   | *1.2 NM to RW22      | *1100                 | 2500                    | 041° →                | ← 221° 2500          |
|              | 1.2 NM               | 0.8                   | 4.4 NM                  | 6.2 NM                | GP 3.00° TCH 50      |
| CATEGORY     | A                    | B                     | C                       | D                     |                      |
| LPV DA       | **622/24             |                       | 200 (200-½)             |                       |                      |
| LNAV/VNAV DA | 840/45               |                       | 418 (500-¾)             |                       |                      |
| LNAV MDA     | 860/24               | 438 (500-½)           | 860/40                  | 438 (500-¾)           |                      |
| CIRCLING     | 920-1<br>498 (500-1) | 1040-1<br>618 (700-1) | 1040-1¾<br>618 (700-1¾) | 1040-2<br>618 (700-2) |                      |

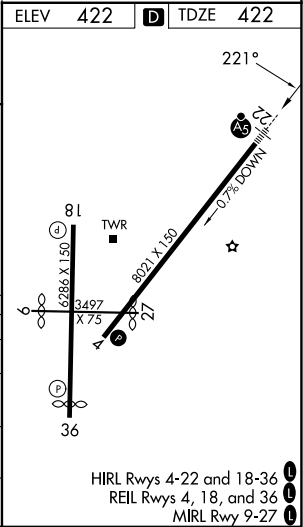

EC-2, 02 OCT 2025 to 30 OCT 2025

EC-2, 02 OCT 2025 to 30 OCT 2025