


WAAS CH 90124 W31A	APP CRS 308°	Rwy Ldg TDZE Apt Elev	7000 590 598
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 31
ABRAHAM LINCOLN CAPITAL (SPI)

RNP APCH - GPS. ▼ Baro-VNAV and VDP NA when using AAA altimeter setting. Inop table does not apply to LPV. ▲ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter setting not received, use AAA altimeter setting and increase LPV DA to 898 feet; increase LNAV/VNAV DA to 967 feet; increase all MDAs 60 feet and LNAV visibility Cats C and D ½ SM, and Circling visibility Cats C and D ¼ SM. For inop ALS, increase LNAV/VNAV visibility all Cats to ¾ SM, increase LNAV visibility Cats A and B to 1 SM, and Cats C and D to 1 ¼ SM. For inop ALS when using AAA altimeter setting, increase LPV visibility all Cats to ¾ SM, increase LNAV/VNAV visibility all Cats to 1 SM, increase LNAV visibility Cats A and B to 1 SM, and Cats C and D to 1 ¼ SM.		MALS ALS	MISSED APPROACH: Climb to 2500 direct JOPOD and hold.
---	--	-------------	--

ATIS 127.65 270.1	SAINT LOUIS APP CON ★ 126.15 323.0	SPRINGFIELD TOWER ★ 121.3 (CTAF) 0 257.8	GND CON 121.9 348.6	UNICOM 122.95
-----------------------------	--	--	-------------------------------	-------------------------

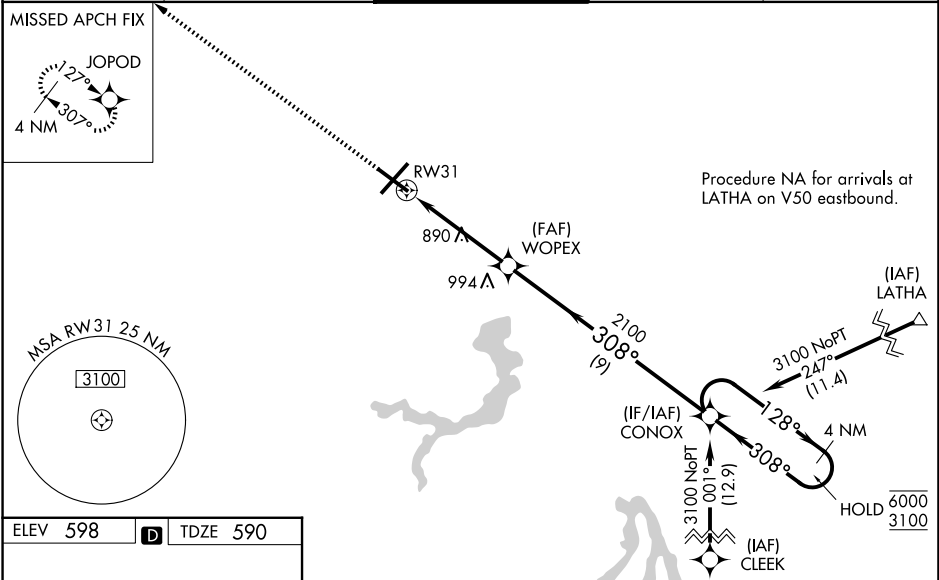

2500

↑

JOPOD

✦

CONOX

4 NM Holding Pattern

WOPEX

2100

1.8 NM to RW31

1.8 NM

2.8 NM

9 NM

128° → 6000

← 308° 3100

308°

2100

GP 3.00°

TCH 55

CATEGORY	A	B	C	D
LPV DA	840-¾ 250 (300-¾)			
LNAV/VNAV DA	909-¾ 319 (400-¾)			
LNAV MDA	1200-¾ 610 (700-¾)		1200-1⅓ 610 (700-1⅓)	
CIRCLING	1200-1 602 (700-1)		1360-2¼ 762 (800-2¼)	1380-2½ 782 (800-2½)

REIL Rwy 13

HIRL Rwys 4-22 and 13-31

①

①