



VORTAC SPI	APP CRS	Rwy Ldg	8001
112.7	215°	TDZE	598
Chan 74		Apt Elev	598

VOR RWY 22

ABRAHAM LINCOLN CAPITAL (SPI)

DME required.		MALSR	MISSED APPROACH: Climb to 2400 on SPI VORTAC R-215 then right turn direct SPI VORTAC and hold.
VDP NA when using AAA altimeter setting. When local altimeter setting not received, use AAA altimeter setting: increase all MDA 60 feet and S-22 visibility Cat C/D ¼ SM, and Circling Cat C/D visibility ¼ SM. For inop ALS, increase S-22 Cat C/D visibility to 1 ¾ SM. For inop ALS when using AAA altimeter setting, increase S-22 Cat C/D visibility to 1 ¾ SM.			

ATIS	SAINT LOUIS APP CON ★	SPRINGFIELD TOWER ★	GND CON	UNICOM
127.65 270.1	126.15 323.0	121.3 (CTAF) 0 257.8	121.9 348.6	122.95

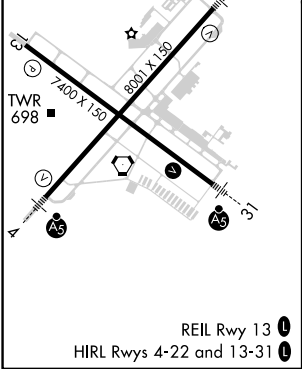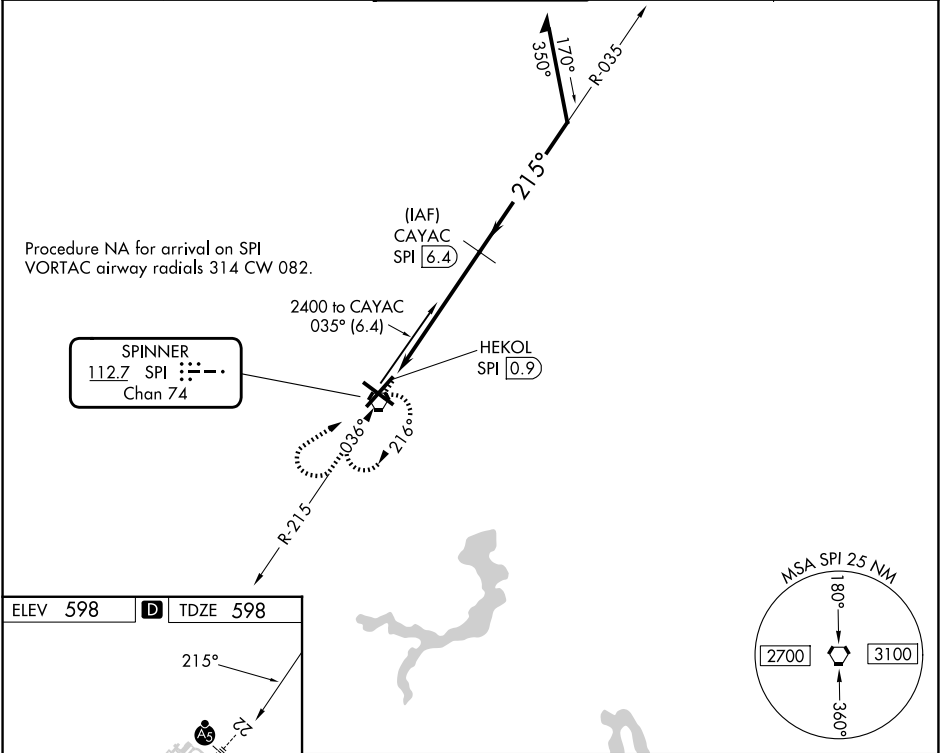

2400		SPI	CAYAC SPI 6.4		Remain within 10 NM
SPI R-215			2400		
SPI VORTAC		HEKOL SPI 0.9	2400		
1.4		4.1 NM	TCH 54		
CATEGORY	A	B	C	D	
S-22	1100-½	502 (600-½)	1100-1	502 (600-1)	
CIRCLING	1100-1	502 (600-1)	1360-2¼ 762 (800-2¼)	1380-2½ 782 (800-2½)	