

WAAS CH 99429 W36B	APP CRS 355°	Rwy Idg 9000 TDZE 480 Apt Elev 542
--	------------------------	---

RNAV (GPS) Y RWY 36R
AUSTIN-BERGSTROM INTL (AUS)

RNP APCH-GPS.

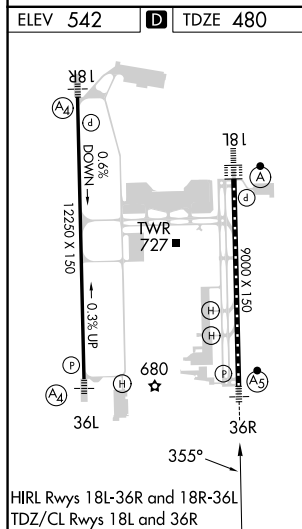
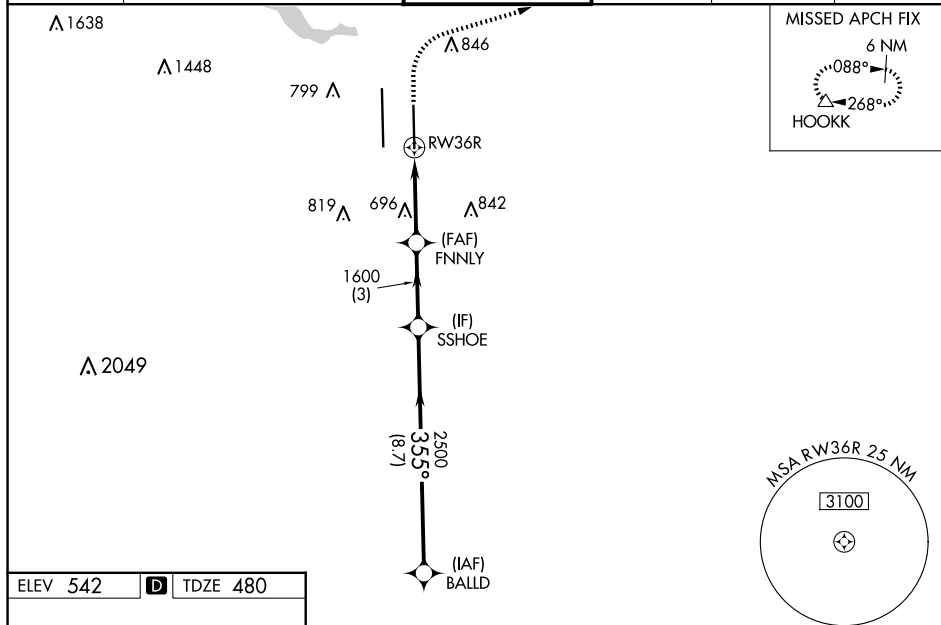
V Use of FD or AP required during simultaneous operations. Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -5°C or above 54°C. For inop ALs increase LPV Cat E visibility to RVR 4000, LNAV/VNAV all Cats visibility to 1% SM and LNAV Cat C/D/E visibility to 1% SM.

MALSR



MISSED APPROACH: Climb to 1000 then climbing right turn to 3000 direct HOOKK and hold.

D-ATIS	AUSTIN APP CON		AUSTIN TOWER		GND CON		CLNC DEL		CPDLC
124.4	127.225	317.65 (EAST)	121.0	281.5	121.9	348.6	125.5	263.0	
	120.875	270.25 (SOUTH)							
	119.0	370.85 (WEST)							

[illegible]