

LOC I-MXK 111.5	APCH CRS 190°	Rwy Idg 10,309 TDZE 274 Arpt Elev 280
---------------------------	-------------------------	--


[USAF]

ILS RWY 19R (CAT II & III)

JOINT BASE ANDREWS (ANDREWS AFB) (KADW)

RADAR or DME required		ALSIF-2	† MISSED APPROACH: Climbing to 2500, intercept ADW VORTAC R-191 to PREZZ and hold.		
-----------------------	--	---------	---	--	--

ATIS 133.675 251.05	POTOMAC APP CON 128.0 335.5	TOWER 118.4 349.0	GND CON 121.8 275.8	CLNC DEL 127.55 285.475	CPDLC
-------------------------------	---------------------------------------	-----------------------------	-------------------------------	-----------------------------------	-------

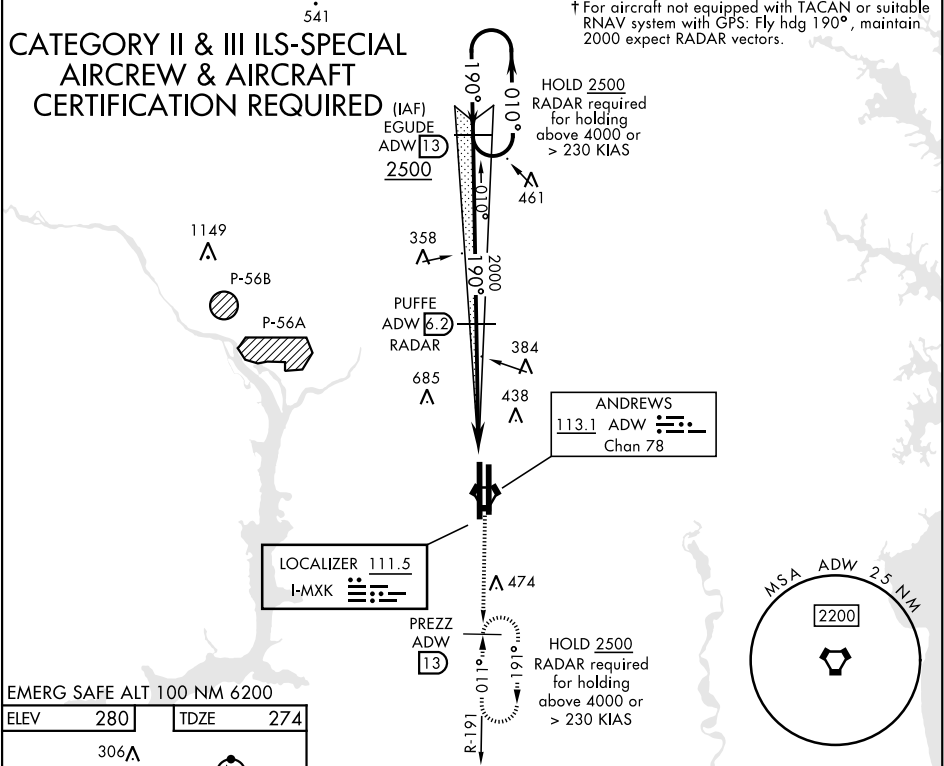

306 A		161 A	483	381	381
R61		11,301 x 200	9756 x 150	0.38 UP	381
TWR		11	1R	381	381
HIRL all rwys TDZL/CL Rwy 1L-19R		11	1R	381	381
EGUDE ADW 13		PUFFE ADW 6.2	VGSi and ILS glidepath not coincident (VGSi Angle 3.00/TCH 71).		2500 PREZZ ADW R-191 13
190°		010°	190°		ADW VORTAC
2500		2000	5.2 NM		1099'
GS 3.00°		TCH 55	CATEGORY		A B C D E
S-ILS 19R		CAT II	RA 99/12		100 DA 374
S-ILS 19R		CAT IIIa	RVR 07		
S-ILS 19R		CAT IIIb	RVR 06		
S-ILS 19R		CAT IIIc	NA		

ILS RWY 19R (CAT II & III)