

WAAS CH 49217 W01A	APP CRS 003°	Rwy Idg 5000 TDZE 372 Apt Elev 372
--	------------------------	---

RNAV (GPS) RWY 1


STURGIS MUNI (TWT)

NA Baro-VNAV NA when using Henderson altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received use Henderson altimeter setting and increase LPV DA to 708 and visibility all Cats to 1½ miles; increase LNAV/VNAV DA to 780 feet and visibility all Cats to 1¾ miles; increase all MDA 60 feet and Circling Cat C visibility ¼ mile. Helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH:
Climb to 2500 direct
OLGEW and hold.

AWOS-3
118.775

EVANSVILLE APP CON ★
124.025 290.9

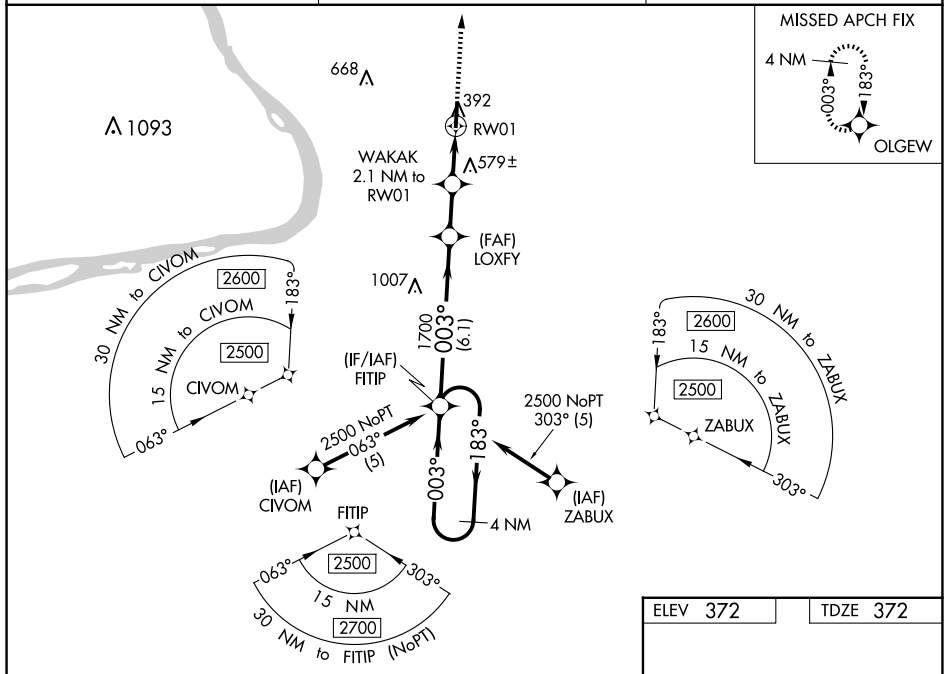UNICOM
122.8(CTAF) **L**4 NM
Holding Pattern

FITIP


250

TDZE 372


GP 3.00°

TCH 45

* LNAV only.

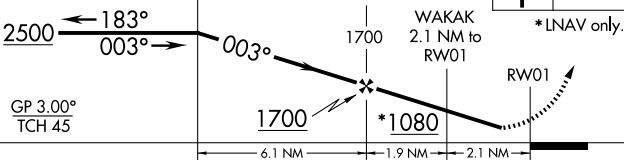

CATEGORY	A	B	C	D
LPV DA	658-7/8 286 (300-7/8)			
LNAV/ VNAV DA	730-1 1/4 358 (400-1 1/4)			
LNAV MDA	820-1 448 (500-1)	820-1 3/8 448 (500-1 1/8)		
 CIRCLING	860-1 488 (500-1)	1000-1 628 (700-1)	1000-1 3/4 628 (700-1 3/4)	1120-2 1/2 748 (800-2 1/2)

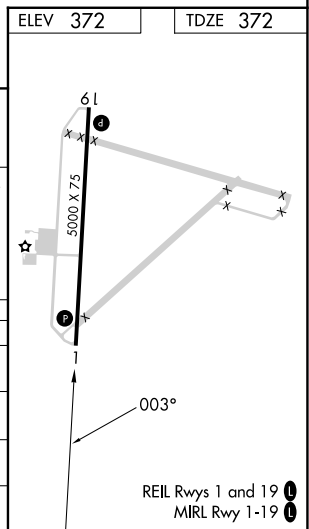

STURGIS, KENTUCKY

Amdt 1A 18SEP14

37°33'N-87°57'W

STURGIS MUNI (TWT)

REIL Rwys 1 and 19 **L**
MIRL Rwy 1-19 **L**

RNAV (GPS) RWY 1