

LOC I-ILN 110.7	APP CRS 224°	Rwy Ldg 10701 TDZE 1077 Apt Elev 1077
---------------------------	------------------------	--

ILS RWY 22R (CAT II & III)
WILMINGTON AIR PARK (ILN)

DME or RADAR required for procedure entry.




Simultaneous approach authorized.
DME from MXQ VOR/DME.
DME use requires simultaneous reception of I-LIN and
MXQ DME.

ALSF-2



MISSED APPROACH: Climb to 1600 then climbing right turn to 3500 on MXQ VOR/DME R-250 to KLARC INT/MXQ 10 DME/RADAR and hold, continue climb-in-hold to 3500.

D-ATIS 124.925	COLUMBUS APP CON 118.85 269.275	WILMINGTON TOWER 119.475	GND CON 121.6
--------------------------	---	------------------------------------	-------------------------

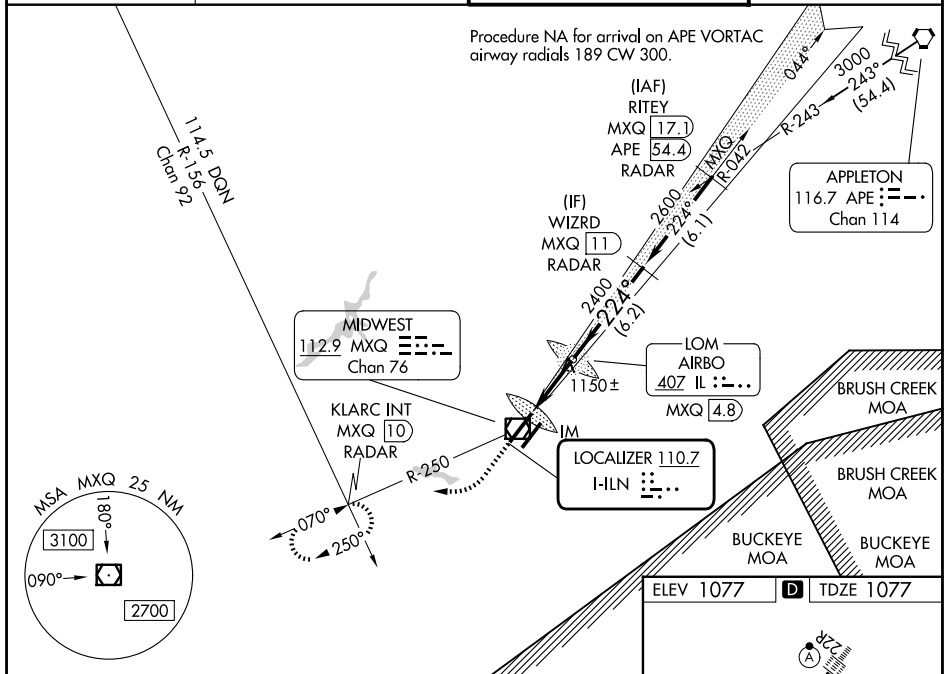

1600 3500
↑ MXQ R-250
KLARC INT

VGSI and ILS glidepath not coincident
(VGSI Angle 3.00/TCH 71).


IM 1180
2327 224°
2400 2600
WIZRD MXQ 11 RADAR
GS 3.00°
TCH 55

1125' 3.8 NM 6.2 NM

CATEGORY	A	B	C	D
S-ILS 22R	CAT II RA 106/12 100 DA 1177			
S-ILS 22R	CAT III RVR 06			

CATEGORY II & III ILS - SPECIAL AIRCREW & AIRCRAFT CERTIFICATION REQUIRED

ELEV 1077	D	TDZE 1077
-----------	----------	-----------



TDZ/CL Rwy 22L and 22R
HIRL Rwy 4L-22R and 4R-22L