

WAAS  
CH **72818**  
**W35A**

APP CRS  
**354°**

Rwy Ldg  
TDZE  
Apt Elev  
**5593**  
**1067**  
**1073**

**RNAV (GPS) RWY 35**  
SHAWNEE RGNL (SNL)



▼

⚠

Baro-VNAV NA when using Seminole altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Seminole altimeter setting: increase LPV DA to 1357 feet; increase LNAV/VNAV DA to 1605 feet and visibility ¼ SM; increase all MDAs 40 feet and visibility Cat C ¼ SM.

MISSED APPROACH:  
Climb to 3000 direct  
FAVAN and hold.

|                            |                                           |                               |
|----------------------------|-------------------------------------------|-------------------------------|
| AWOS-3PT<br><b>118.275</b> | OKE CITY APP CON<br><b>120.45 288.325</b> | UNICOM<br><b>122.7 (CTAF)</b> |
|----------------------------|-------------------------------------------|-------------------------------|

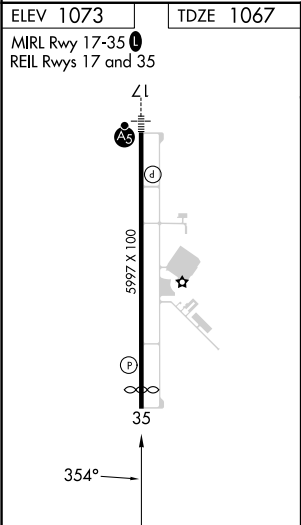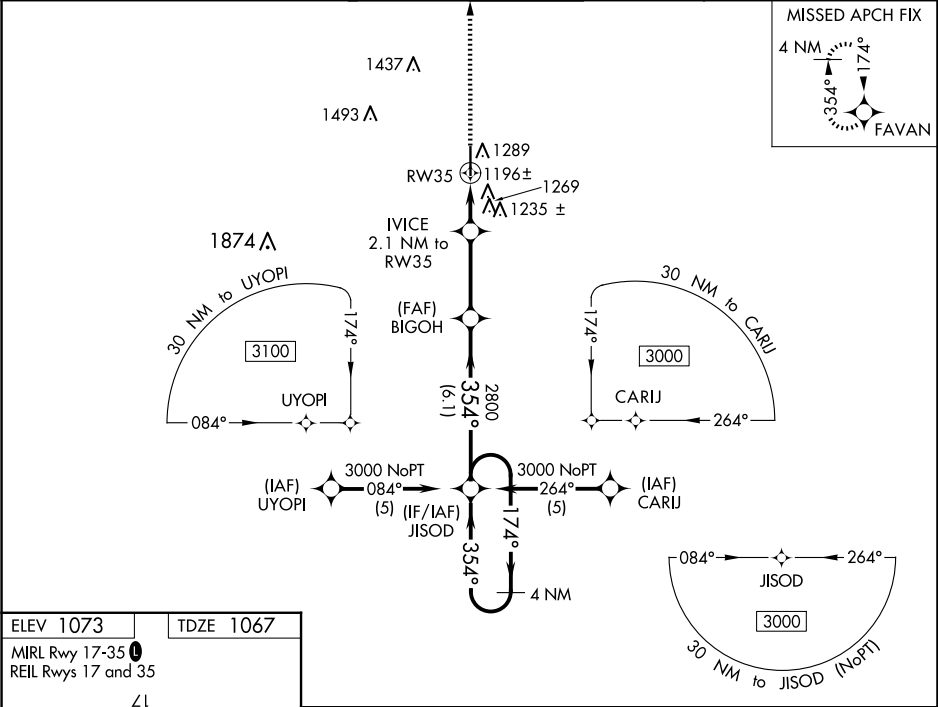

3000  
FAVAN

VGSI and RNAV glidepath not coincident  
(VGSI Angle 3.00/TCH 42).

\*LNAV only.

IVICE  
2.1 NM to RW35  
BIGOH  
2800  
RW35  
1780\*  
2800  
JISOD  
174°  
354°  
3000  
4 NM Holding Pattern  
GP 3.00°  
TCH 47

| CATEGORY     | A       | B            | C                       | D  |
|--------------|---------|--------------|-------------------------|----|
| LPV DA       | 1317-1  | 250 (300-1)  |                         | NA |
| LNAV/VNAV DA | 1565-1¾ | 498 (500-1¾) |                         | NA |
| LNAV MDA     | 1520-1  | 453 (500-1)  | 1520-1¼<br>453 (500-1¼) | NA |
| CIRCLING     | 1600-1  | 527 (600-1)  | 1640-1½<br>567 (600-1½) | NA |