

WAAS CH 87116 W20A	APP CRS 205°	Rwy Idg TDZE Apt Elev	5600 568 571
--	------------------------	-----------------------------	---


RNAV (GPS) RWY 20
DANVILLE RGNL (DAN)

RNP APCH.

⚠ Baro-VNAV NA when using Roxboro, NC altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 47°C. When local altimeter setting not received, use Roxboro, NC altimeter setting and increase all DA 62 feet and all MDA 80 feet; increase LPV and LNAV/VNAV all Cats visibility ¼ mile and LNAV Cats C and D ¼ mile. VDP NA with Roxboro, NC altimeter setting.

MISSED APPROACH: Climb to 2500 direct LANTA and hold.

ASOS 128.125	WASHINGTON CENTER 124.05 352.0	UNICOM 123.05 (CTAF) 0
------------------------	--	----------------------------------

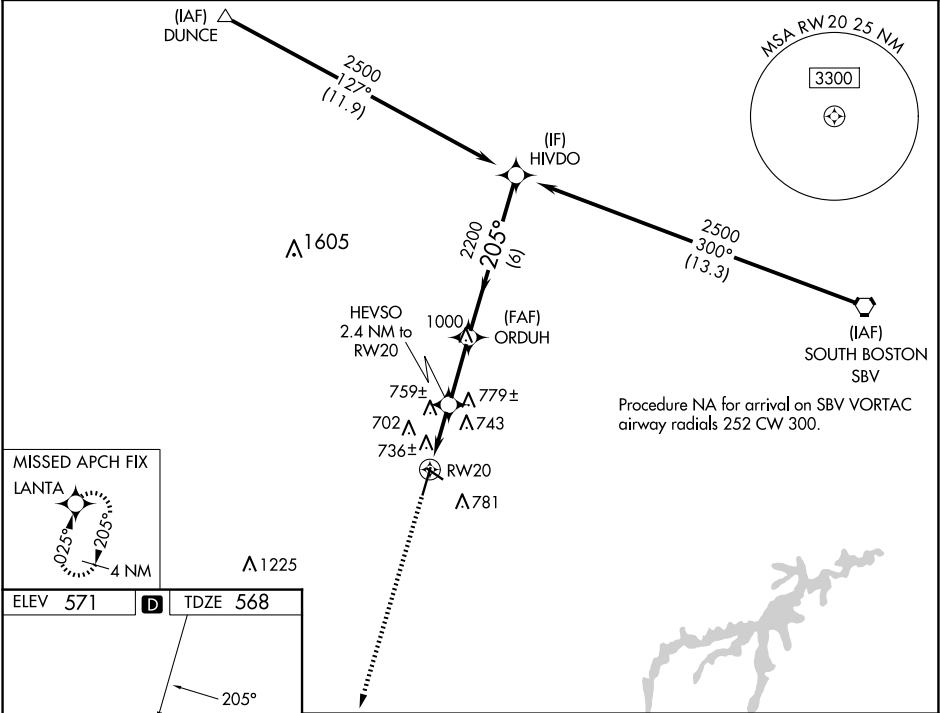

2500

LANTA

*LNAV only:

1.3 NM to RW20

RW20

1.3 NM

1.1 NM

2.5 NM

6 NM

HEVSO

2.4 NM to RW20

ORDUH

2200

HIVDO

2500

Procedure Turn NA

GP 3.00°

TCH 50

CATEGORY	A	B	C	D
LPV DA	768-1 200 (200-1)			
LNAV/VNAV DA	1026-1½ 458 (500-1½)			
LNAV MDA	1020-1 452 (500-1)	1020-1¼ 452 (500-1¼)	1020-1½ 452 (500-1½)	

623☆

5900 X 100

3910 X 100

1.1% UP

0.5% UP

25

2

13

02

31

HIRL Rwy 2-20

MIRL Rwy 13-31

REIL Rwy 13, 20 and 31

NE-3, 02 OCT 2025 to 30 OCT 2025

NE-3, 02 OCT 2025 to 30 OCT 2025