

WAAS CH 93808 W35A	APP CRS 355°	Rwy Ldg 7201 TDZE 1008 Apt Elev 1009
--	------------------------	---

RNAV (GPS) RWY 35
PONCA CITY RGNL (PNC)

RNP APCH - GPS.

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Baro-VNAV and VDP NA when using WLD altimeter setting. When local altimeter setting not received, use WLD altimeter setting and increase LPV DA to 1377 feet and all visibilities ¼ SM. Increase LNAV/VNAV DA to 1560 feet and all visibilities ½ SM. Increase all MDAs 100 feet and LNAV visibility Cat C/D ¾ SM, and Circling visibility Cat C/D ½ SM.





ODALS

ASOS
134.075



KANSAS CITY CENTER
127.8 319.1

UNICOM
123.0 (CTAF) **L**

MISSED APCH FIX

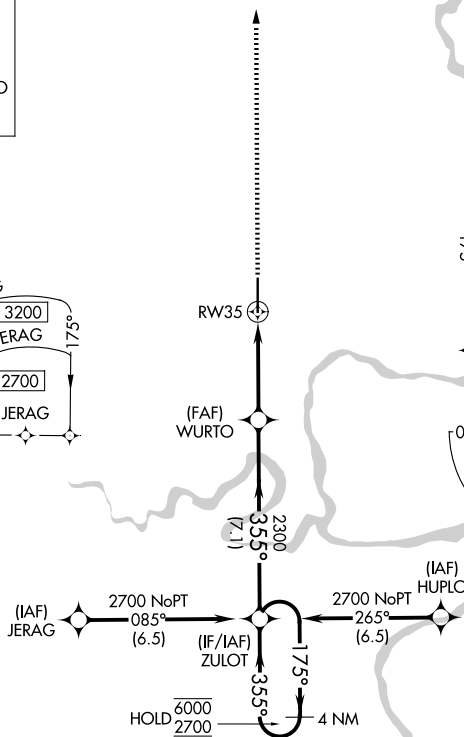

ELEV 1009	TDZE 1008
HIRL Rwy 17-35 L	

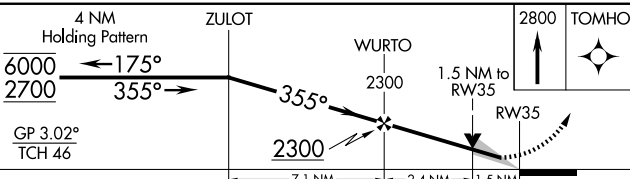

CATEGORY		A		B		C		D	
LPV	DA	1295-3 $\frac{3}{4}$		287 (300-3 $\frac{3}{4}$)					
LNAV/ VNAV	DA	1478-1 $\frac{1}{4}$		470 (500-1 $\frac{1}{4}$)					
LNAV	MDA	1540-3 $\frac{3}{4}$ 532 (600-3 $\frac{3}{4}$)		1540-1 $\frac{1}{8}$ 532 (600-1 $\frac{1}{8}$)					
CIRCLING		1540-1 531 (600-1)	1580-1 571 (600-1)	1800-2 $\frac{1}{4}$ 791 (800-2 $\frac{1}{4}$)	1880-2 $\frac{3}{4}$ 871 (900-2 $\frac{3}{4}$)				