


WAAS CH 61319 W11A	APP CRS 106°	Rwy Ldg TDZE Apt Elev 9800 4 4
--	------------------------	--

RNAV (GPS) Y RWY 11


LOUIS ARMSTRONG NEW ORLEANS INTL (MSY)

RNP APCH - GPS.	ALSF-2	MISSED APPROACH: Climb to 2000 direct ZUBEL and on track 195° to SAFES and hold.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1°C or above 54°C. For inop ALSF-2, increase LNAV/VNAV all Cats visibility to RVR 4000.		

D-ATIS 127.55	NEW ORLEANS APP CON WEST 125.5 350.35 EAST 133.15 290.3	NEW ORLEANS TOWER 119.5 254.3	GND CON 121.9 273.525	CLNC DEL 120.925	CPDLC
-------------------------	---	---	---------------------------------	----------------------------	-------

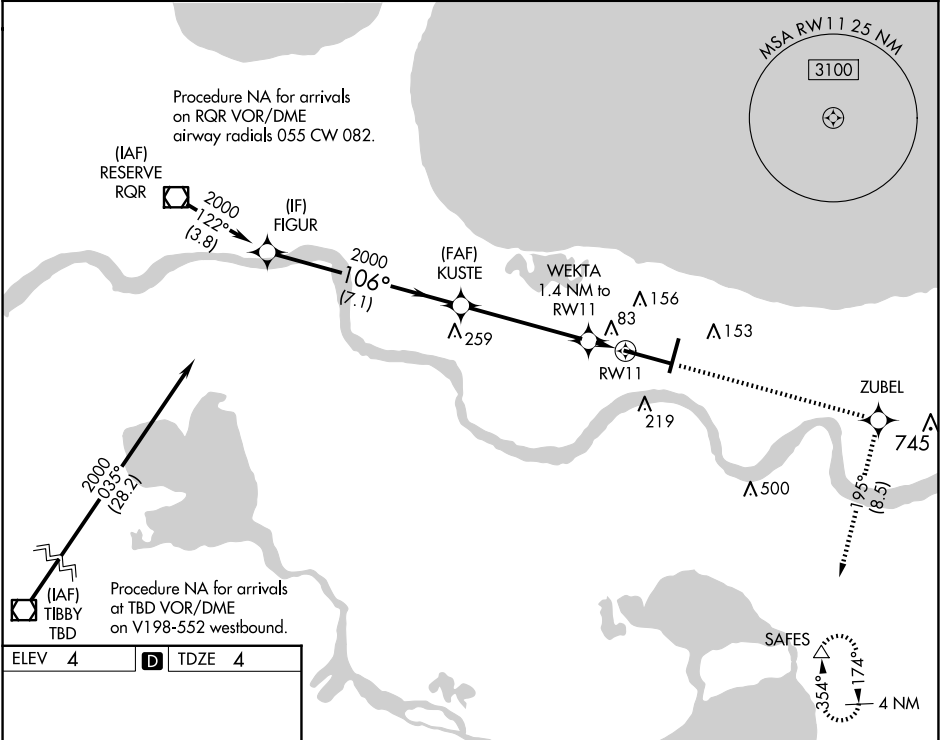

ELEV 4	D	TDZE 4
--------	---	--------

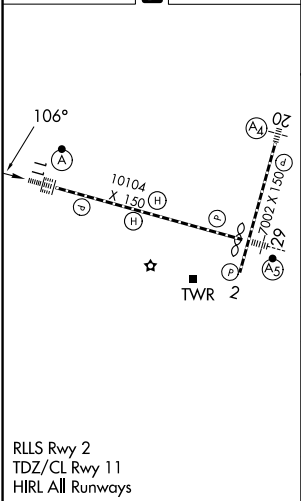

VGSI and RNAV glidepath not coincident (VGSI Angle 2.80/TCH 73).			
FIGUR	KUSTE	ZUBEL	SAFES
2000	2000	tr 195°	△
GP 3.00° TCH 55	2000	WEKTA 1.4 NM to RW11	RW11
7.1 NM	4.7 NM	1.4 NM	
CATEGORY	A	B	C
LPV DA	204/18	200 (200-½)	
LNAV/VNAV DA	254/24	250 (300-½)	
LNAV MDA	340/24	336 (400-½)	340/26 336 (400-½)
CIRCLING	520-1	516 (600-1)	580-1½ 576 (600-½) 600-2 596 (600-2)

SC-4, 02 OCT 2025 to 30 OCT 2025

SC-4, 02 OCT 2025 to 30 OCT 2025