

LOC I-RGO	APP CRS	Rwy Idg	7000
109.5	189°	TDZE	1218
		Apt Elev	1226


ILS or LOC RWY 19
AKRON-CANTON RGNL (CAK)

⚠ ** RVR 1800 authorized with the use of FD or AP or HUD to DA. For inoperative ALS, increase CAT C/D visibility to RVR 6000. ZEVLO fix minimums: For inoperative ALS, increase Cat C/D visibility to RVR 5500.

MALSR

MISSED APPROACH: Climb to 1700 then climbing left turn to 3000 direct BSV VOR/DME and hold.

ATIS	CLEVELAND APP CON *	AKRON-CANTON TOWER	GND CON	CLNC DEL
121.05	125.5 269.25	134.75 279.575	121.7 348.6	132.05

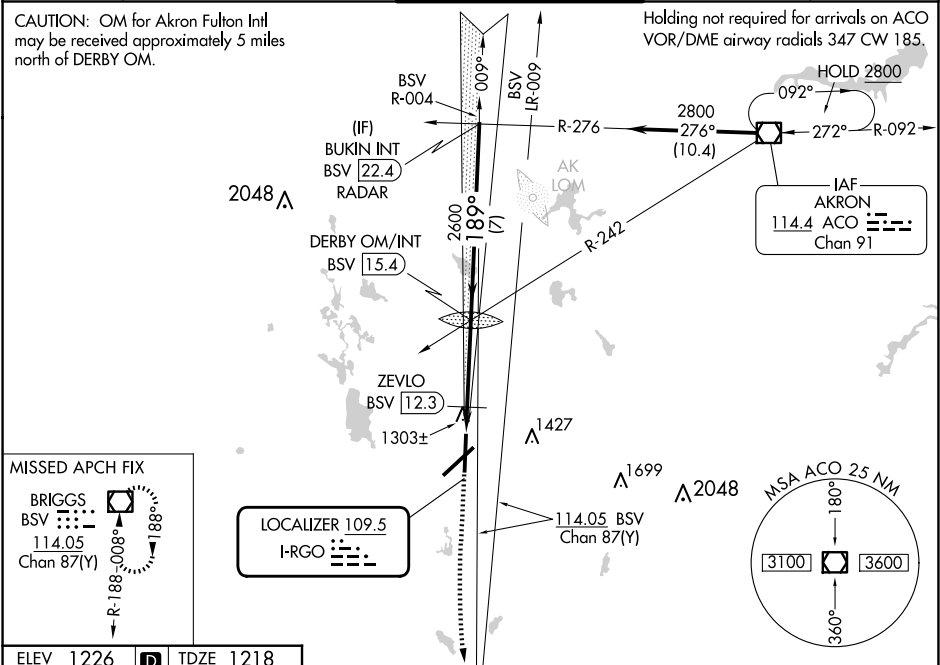


MISSED APCH FIX

BRIGGS BSV [114.05] Chan 87(Y)

R-188-008°

188°

ELEV 1226	D	TDZE 1218
-----------	----------	-----------

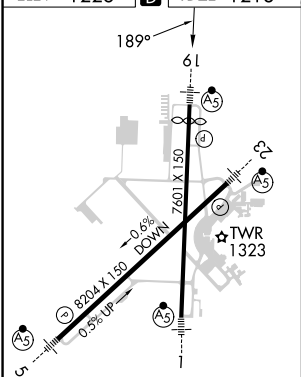

HIRL Rwy 1-19 and 5-23					
FAF to MAP 4.2 NM					
Knots	60	90	120	150	180
Min:Sec	4:12	2:48	2:06	1:41	1:24

	1700	3000	BSV	DERBY OM/INT BSV [15.4]	BUKIN INT BSV [22.4] RADAR
*LOC only					
	1620	2597	2600	2700	2800
	1.1	3.1 NM	7 NM		
CATEGORY	A	B	C	D	
S-ILS 19	**1418/24 200 (200-½)				
S-LOC 19	1620/24	402 (400-½)	1620/40	402 (400-¾)	
CIRCLING	1760-1	534 (600-1)	1780-1½ 554 (600-1½)	1800-2 574 (600-2)	
ZEVLO FIX MINIMUMS					
S-LOC 19	1580/24 362 (400-½)				1580/40 362 (400-¾)
CIRCLING	1760-1	534 (600-1)	1780-1½ 554 (600-1½)	1800-2 574 (600-2)	