

WAAS CH 45599 W17A	APP CRS 176°	Rwy Idg 5500 TDZE 207 Apt Elev 208
--	------------------------	---


RNAV (GPS) RWY 17
OLYMPIA RGNL (OLM)

T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below
A -9°C (16°F) or above 54°C (130°F). DME/DME RNP-0.3 NA.
 For inop ALS; increase LNAV/VNAV visibility all Cats to 1 $\frac{1}{2}$ SM.
 Increase LNAV Cats C/D to 1 $\frac{3}{4}$ SM.




MISSED APPROACH: Climb to 4000 direct CORER and on track 181° to CETRA and hold, continue climb-in-hold to 4000.

ATIS 135.725	SEATTLE APP CON 121.1 290.9	OLYMPIA TOWER★ 124.4 (CTAF) 0 254.25	GND CON 121.6	UNICOM 122.95
-----------------	--------------------------------	---	------------------	------------------

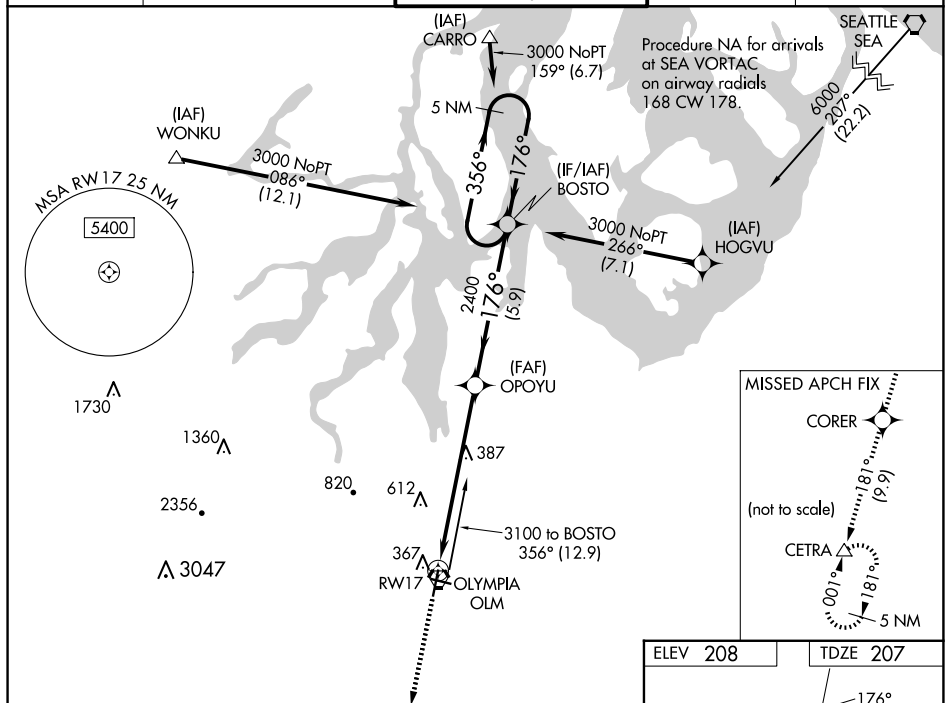

4000 ↑	CORER ✦	tr 181°	CETRA △				
* LNAV only				5 NM Holding Pattern 356° → 3000 ← 176° GP 3.00° TCH 53			
CATEGORY	A		B		C		D
LPV DA	407-½		200 (200-½)				
LNAV/VNAV DA	629-¾		422 (500-¾)				
LNAV MDA	680-½ 473 (500-½)		680-1 473 (500-1)				
CIRCLING	720-1 512 (600-1)	860-1 652 (700-1)	1020-2½ 812 (900-2½)	1020-2¾ 812 (900-2¾)			

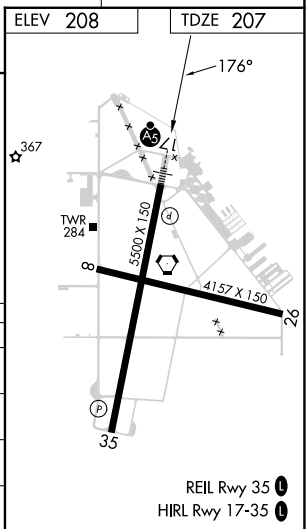

OLYMPIA RGNL (OLM)
RNAV (GPS) RWY 17