

RNAV (GPS) RWY 3

MID-OHIO VALLEY RGNL (PKB)

⚠ Circling Rwy 10, 28 NA at night. Rwy 3 helicopter visibility reduction below RVR 4000 NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 38°C. **⚠** When local altimeter setting not received, use Athens/Albany altimeter setting: increase LPV DA to 1302 feet and visibility all Cats ¼ SM; increase LNAV/VNAV DA to 1436 feet and visibility all Cats ½ SM; increase all MDAs 100 feet and visibility Cats C and D ½ SM. For inop ALS, increase LNAV/VNAV all Cats visibility to 1¾ SM and LNAV Cats A/B visibility to RVR 5500. For inop ALS, when using Athens/Albany altimeter setting, increase LPV all Cats visibility to 1¾ SM and LNAV/VNAV all Cats visibility to 1¾ SM.

MISSED APPROACH:
Climb to 3000 direct
OWAVE and hold.

ATIS 124.35	INDIANAPOLIS CENTER 125.55 317.475	PARKERSBURG TOWER ★ 123.7 (CTAF) 0 257.8	GND CON 126.45	UNICOM 122.95
----------------	---------------------------------------	---	-------------------	------------------






Diagram illustrating a 4 NM Holding Pattern (UNSAW) with various navigation aids and distances:

- 4 NM Holding Pattern** (UNSAW)
- ODENN** (2600)
- WIRNI** (2.7 NM to RW03)
- GP 3.00° TCH 48**
- Distances:** 6 NM, 2.8 NM, 1.4 NM, 1.3 NM
- Altitudes:** 3000, 210°, 030°, 030°, 2600, 1700, 1.3 NM to RW03
- Navigation Aids:** * LNAV only, * 1.3 NM to RW03, RW03

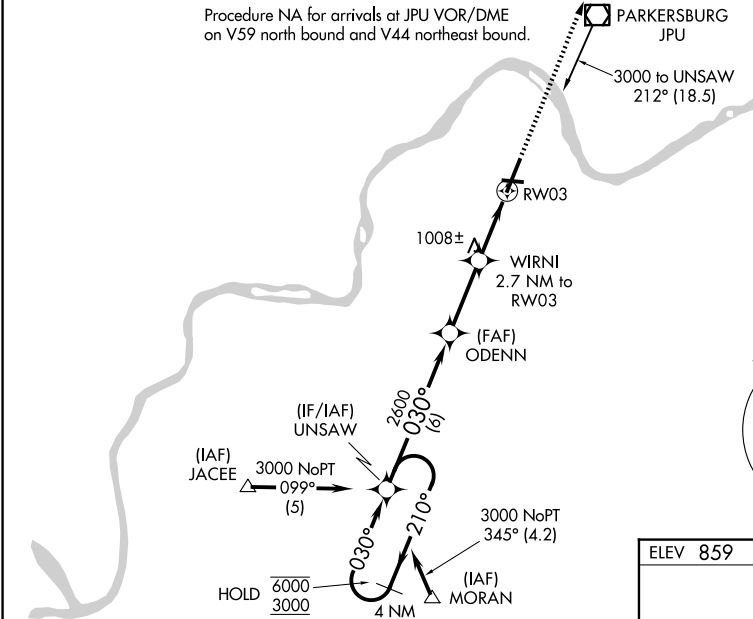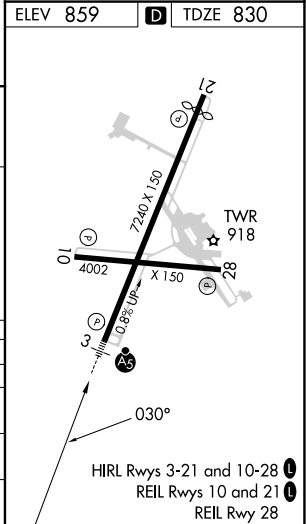

NE-4, 02 OCT 2025 to 30 OCT 2025

NE-4, 02 OCT 2025 to 30 OCT 2025