



LOC I-JDP 108.7	APP CRS 276°	Rwy Ldg 12000 TDZE 875 Apt Elev 896
---------------------------	------------------------	--

ILS or LOC RWY 27

CINCINNATI/NORTHERN KENTUCKY INTL (CVG)

RNP APCH - GPS. From FISBU, BREWZ, ZALED or YEYUP.	MALSR	MISSED APPROACH: Climb to 2000 then climbing left turn to 3000 direct FLM VOR/DME and hold.
RADAR required for procedure entry at KAYDE.		
▼ For inop ALS, increase S-LOC 27 Cat C/D visibility to 1½ SM. *RVR 1800 authorized with use of FD or AP or HUD to DA.		

D-ATIS 134.375	CINCINNATI APP CON 119.7 363.15 (090°-269°) 123.875 363.15 (270°-089°)	CINCINNATI TOWER 118.975 360.85 (18L/36R) 118.3 (9/27, 18C/36C) 133.325 (18R/36L)	GND CON 121.7
--------------------------	--	---	-------------------------

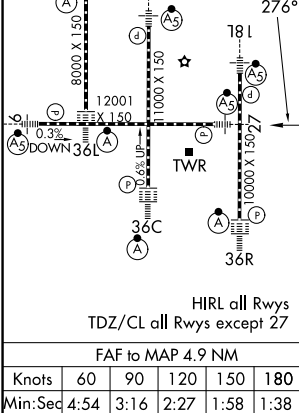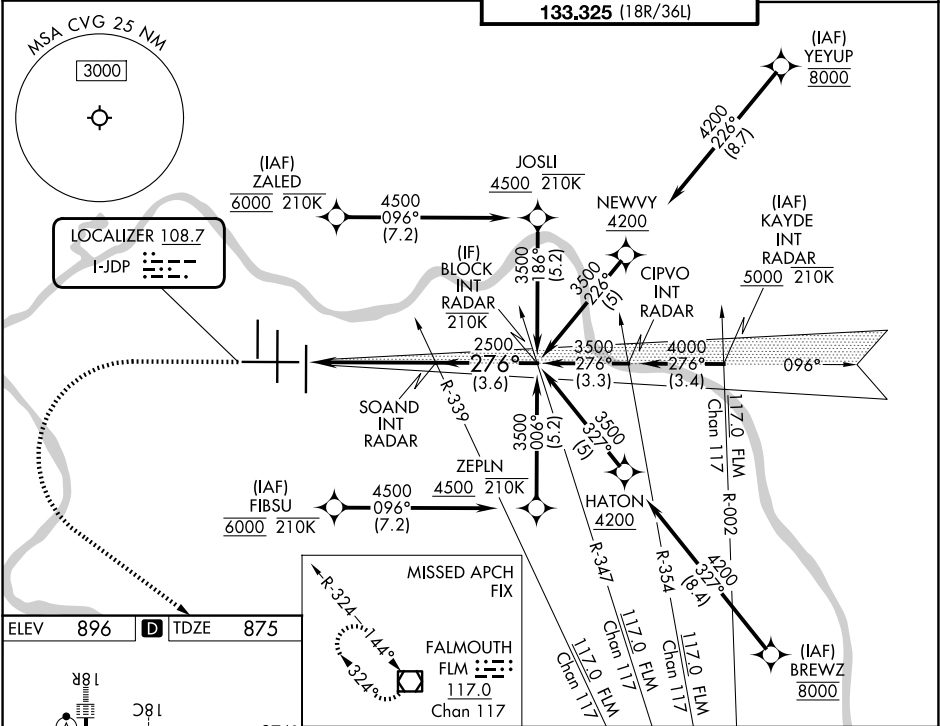

2000	3000	FLM	VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 67).					
			BLOCK INT RADAR					
			SOAND INT RADAR					
			2500					
			276°					
			2500					
			3500					
			GS 3.00° TCH 55					
			4.9 NM					
			3.6 NM					
CATEGORY	A		B		C		D	
S-ILS 27*			1075/24		200 (200-½)			
S-LOC 27	1340/24		465 (500-½)		1340/50		465 (500-1)	
CIRCLING	1460-1		564 (600-1)		1560-1¾ 664 (700-1¾)		1560-2 664 (700-2)	

SE-1, 02 OCT 2025 to 30 OCT 2025

SE-1, 02 OCT 2025 to 30 OCT 2025