

WAAS CH 93612 W24A	APP CRS 241°	Rwy Ldg TDZE 47 Apt Elev 47
--	------------------------	---

RNAV (GPS) RWY 24

NANTUCKET MEML (ACK)

RNP APCH - GPS.

▼


⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -12°C or above 54°C.
For inop ALS increase LNAV/VNAV all Cats visibility to RVR 4000 and LNAV Cats C/D visibility to 1½ SM. When local altimeter setting not received, use HYA altimeter setting and increase LPV DA to 310 feet and all visibilities to RVR 2000; increase LNAV/VNAV DA to 363 feet; increase all MDAs 80 feet and LNAV visibility Cat C/D to RVR 6000 and Circling visibility Cat C/D ¼ SM. Baro-VNAV and VDP NA when using HYA altimeter setting.
For inop ALS when using HYA altimeter setting, increase LPV and LNAV/VNAV visibility all Cats to RVR 4500 and LNAV Cat C/D to 1½ SM.

SSALR

MISSED APPROACH:
Climb to 2300 direct
UFTAC and hold.

ATIS 127.5	BOSTON APP CON 126.1 318.1	NANTUCKET TOWER ★ 118.3 (CTAF) 0	GND CON 132.5	CLNC DEL 119.375	UNICOM 122.95
----------------------	--------------------------------------	--	-------------------------	----------------------------	-------------------------

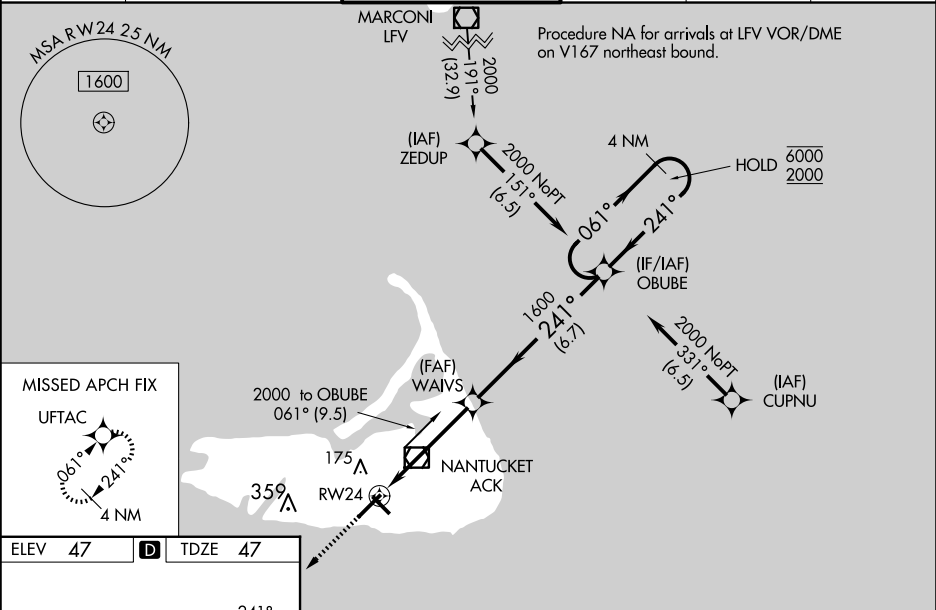

ELEV **47** **D** TDZE **47**

TDZ/CL Rwy 24
REIL Rwys 15 and 33
MIRL Rwy 15-33 **1**
HIRL Rwy 6-24 **1**

2300 ↑ UFTAC ✧		4 NM Holding Pattern OBUBE 061° → 6000 ← 241° 2000 WAIVS 1600 241° 1600 1.3 NM to RW24 RW24 1.3 NM 3.4 NM 6.7 NM GP 3.00° TCH 47			
CATEGORY	A	B	C	D	
LPV DA	247/18 200 (200-½)				
LNAV/VNAV DA	300/24 253 (300-½)				
LNAV MDA	520/24	473 (500-½)	520/50	473 (500-1)	
C CIRCLING	520-1	473 (500-1)	720-2 673 (700-2)	720-2¼ 673 (700-2¼)	