

WAAS CH 81912 W06A	APP CRS 061°	Rwy Idg TDZE Apt Elev	5765 38 47
--	------------------------	-----------------------------	---------------------------------------

RNAV (GPS) RWY 6
NANTUCKET MEML (ACK)



For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -12°C (11°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Baro-VNAV and VDP NA when using Hyannis altimeter setting. When local altimeter setting not received, use Hyannis altimeter setting and increase LPV DA to 301, LNAV/VNAV DA to 363 and all MDA 80 ft; increase LNAV Cats C/D visibility to RVR 5000 and Circling Cats C/D visibility ½ SM. Inoperative table does not apply to LPV. For inoperative ALS increase LNAV/VNAV all Cats visibility to RVR 4500, and LNAV Cat D visibility to RVR 5500. For inoperative ALS when using Hyannis altimeter setting, increase LPV all Cats visibility to RVR 4500, increase LNAV/VNAV all Cats visibility to RVR 6000 and increase LNAV Cats C/D to 1½ SM.

MALSF



MISSED APPROACH:
Climb to 1800 direct
WAWS and hold.

ATIS 127.5	BOSTON APP CON 126.1 318.1	NANTUCKET TOWER ★ 118.3 (CTAF) 0	GND CON 132.5	CLNC DEL 119.375	UNICOM 122.95
----------------------	--------------------------------------	--	-------------------------	----------------------------	-------------------------

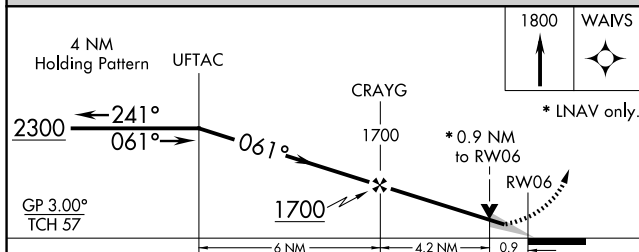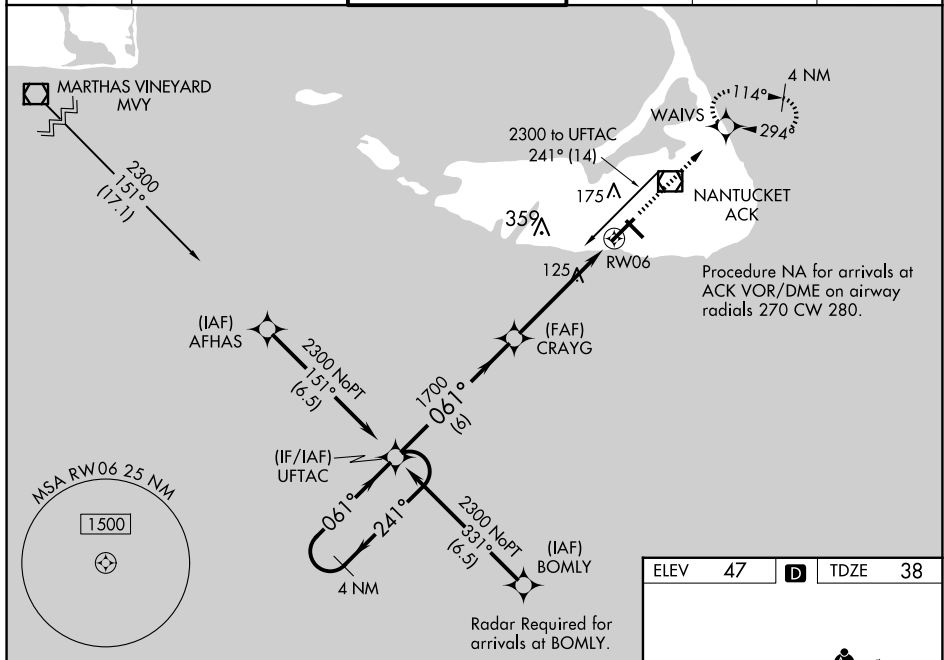

CATEGORY		A	B	C	D
LPV	DA	238/40		200 (200-¾)	
LNAV/ VNAV	DA	300/40		262 (300-¾)	
LNAV	MDA	380/40		342 (400-¾)	
 CIRCLING		480-1 433 (500-1)	500-1 453 (500-1)	720-2 673 (700-2)	720-2¼ 673 (700-2¼)

