

|               |         |          |       |       |
|---------------|---------|----------|-------|-------|
| LOC/DME F-LAS | APP CRS | Rwy Ldg  | 26R   | 26L   |
| 110.3         | 259°    | TDZE     | 12638 | 10526 |
| Chan 40       |         | Apt Elev | 2067  | 2069  |
|               |         |          | 2181  | 2181  |

ILS Z or LOC Z RWY 26R  
HARRY REID INTL (LAS)


**⚠** For inop ALS, increase S-ILS-26R all Cats visibility to ½ SM, S-LOC-26R Cat E visibility to 1 ¾ SM. Inop table does not apply to sidestep 26L.

MALS Rwy 26R


MALSF Rwy 26L

**MISSED APPROACH:** Climb to 3200 then climbing right turn to 6000 on heading 079° and on BLD R-287 to BLD VORTAC and hold, continue climb-in-hold to 6000.

|        |                                               |                                                                       |                                                    |          |       |
|--------|-----------------------------------------------|-----------------------------------------------------------------------|----------------------------------------------------|----------|-------|
| D-ATIS | LAS VEGAS APP CON                             | LAS VEGAS TOWER                                                       | GND CON                                            | CLNC DEL | CPDLC |
| 132.4  | 125.025 379.15 (West)<br>119.775 282.2 (East) | 118.75 257.8 (Rwy 1L/19R, 1R/19L)<br>119.9 257.8 (Rwy 8L/26R, 8R/26L) | 121.1 270.8 E of 1R/19L<br>121.9 254.3 W of 1L/19R | 118.0    |       |

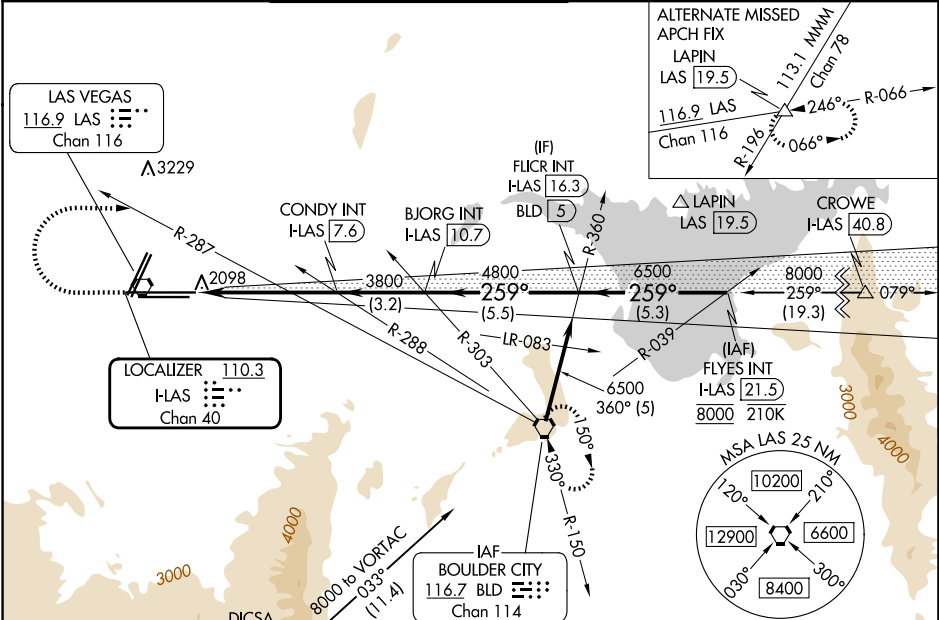

|           |               |
|-----------|---------------|
| ELEV 2181 | TDZE 26R 2067 |
|           | TDZE 26L 2069 |

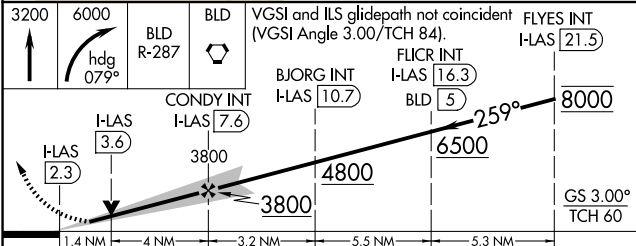

| CATEGORY     | A                    | B                    | C                     | D                    | E |
|--------------|----------------------|----------------------|-----------------------|----------------------|---|
| S-ILS 26R    | 2334-¾ 267 (200-¾)   |                      |                       |                      |   |
| S-LOC 26R    | 2560-¾ 493 (400-¾)   | 2560-1⅛ 493 (400-1⅛) |                       |                      |   |
| SIDESTEP 26L | 2560-1 491 (400-1)   | 2560-1½ 491 (400-1½) | 2560-2 491 (400-2)    |                      |   |
| CIRCLING     | 3020-1¼ 839 (900-1¼) | 3060-1¼ 879 (900-1¼) | 3100-2¾ 919 (1000-2¾) | 3540-3 1359 (1400-3) |   |

