

APP CRS	Rwy Ldg	10526
259°	TDZE	2069
	Apt Elev	2181

RNAV (RNP) RWY 26L
HARRY REID INTL (LAS)

HARRY REID INTL (LAS)

RNP AR APCH.

T For uncompensated Baro-VNAV systems, procedure NA below 0°C or above 54°C.

MALSF



MISSED APPROACH: Climb to 7000 on the RNAV missed approach route to BLD VORTAC and hold.

*Missed approach requires minimum climb of 255 feet per NM to 3200.

D-ATIS
132.4

LAS VEGAS APP CON
125.025 379.15 (West)
119.775 282.2 (East)

LAS VEGAS TOWER

118.75 257.8 (Rwy 1L/19R, 1R/19L)
119.9 257.8 (Rwy 8L/26R, 8R/26L)


GND CON

121.1 270.8 E of 1R/19L
121.9 254.3 W of 1L/19R

CINC DEL

118.0

CPDLC

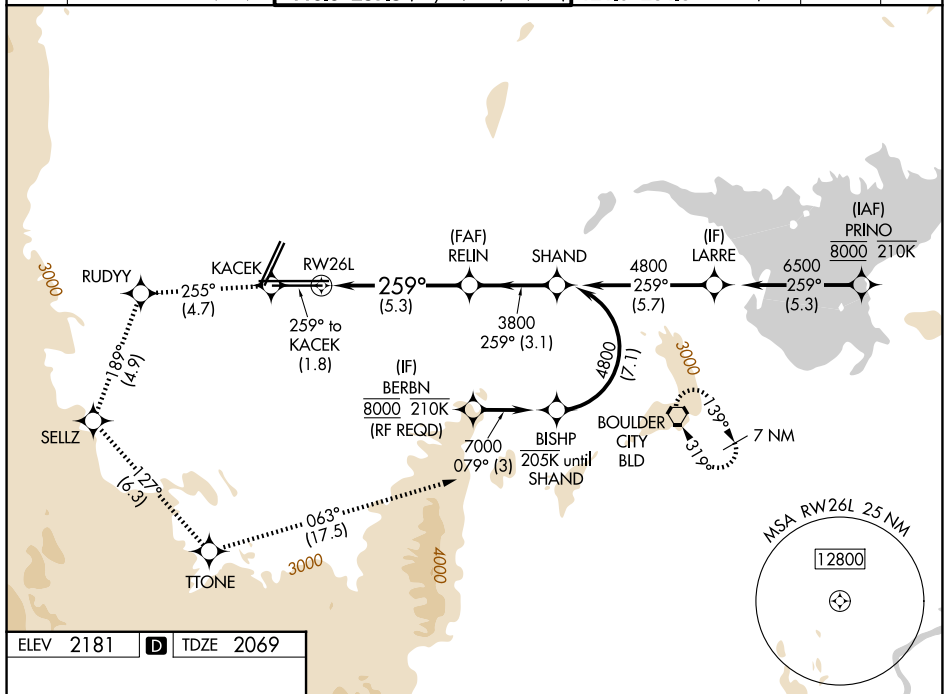


ELEV 218'

D

TC

ZE 2069



MIRL Rwy 1R-19L

REIL Rwy's 1R, 8R, 19L and 19R

HIRL Rwy 1L-19R, 8L-26R and 8R-26L


LAS VEGAS, NEVADA

Orig 25FEB21

7000 ↑ tr 259°	KACEK  tr 255°	RUDYY  tr 189°	SELLZ  tr 127°	TTONE  tr 063°	BLD 
----------------------	---	---	---	---	--

VGSI and RNAV glidepath not coincident
(VGSI Angle 3.00/TCH 84).

See planview for multiple IF locations.

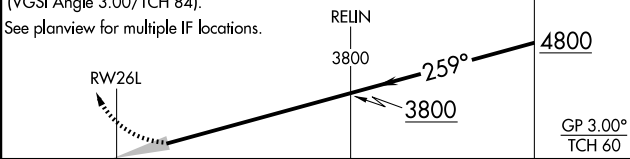

	5.3 NM		3.1 NM		
CATEGORY	A	B	C	D	
RNP 0.30 DA*	2450-7 ₈ 381 (300-7 ₈)				
RNP 0.30 DA	2502-1 433 (400-1)				

AUTHORIZATION REQUIRED

HARRY REID INTL (LAS)

RNAV (RNP) RWY 26L