
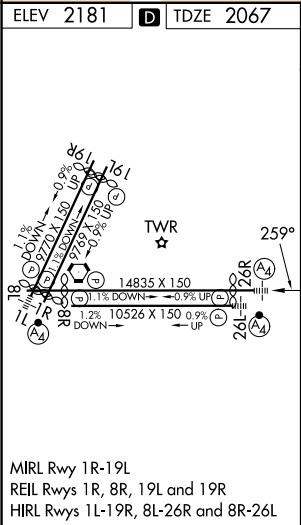


APP CRS	Rwy Ldg	12638
259°	TDZE	2067
	Apt Elev	2181

RNAV (RNP) RWY 26R

HARRY REID INTL (LAS)

RNP AR APCH-GPS.		MALS	MISSED APPROACH: Cimb to 7000 on the RNAV missed approach route to BLD VORTAC and hold.		
▼ For uncompensated Baro-VNAV systems, procedure NA below -1°C or above 54°C.			*Missed approach requires minimum climb of 230 feet per NM to 3200.		
D-ATIS	LAS VEGAS APP CON	LAS VEGAS TOWER	GND CON	CLNC DEL	CPDLC
132.4	125.025 379.15 (West) 119.775 282.2 (East)	118.75 257.8 (Rwy 1L/19R, 1R/19L) 119.9 257.8 (Rwy 8L/26R, 8R/26L)	121.1 270.8 E of 1R/19L 121.9 254.3 W of 1L/19R	118.0	

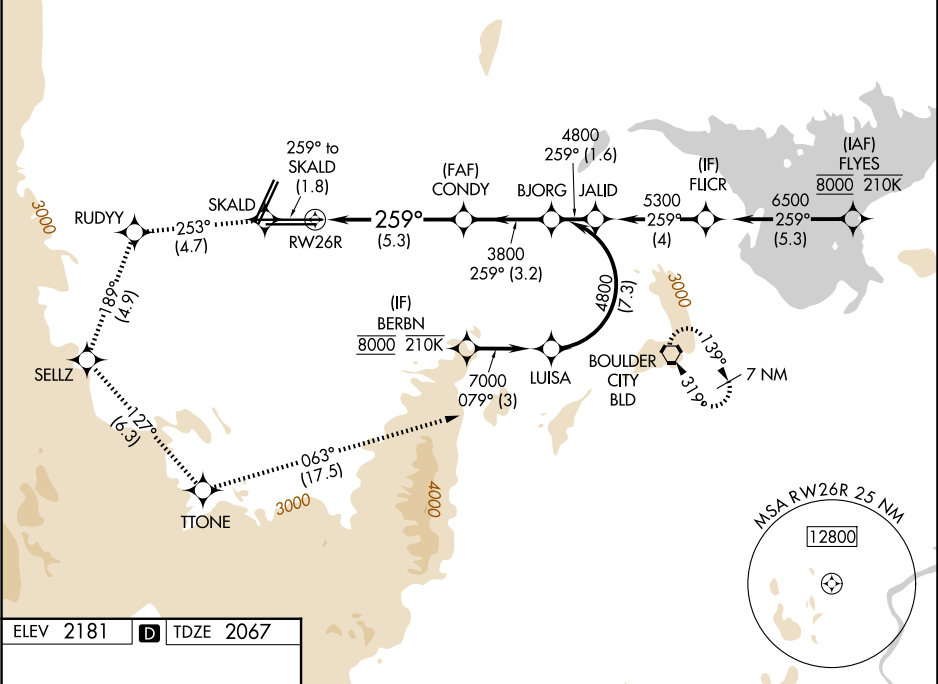

7000	SKALD	tr 253°	RUDYY	tr 189°	SELLZ	tr 127°	TTONE	tr 063°	BLD
↑ tr 259°	✧		✧		✧		✧		◻
VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 84). See planview for multiple IF locations.									
RW26R CONDY 3800 259° 3800 4800 GP 3.00° TCH 60 5.3 NM 3.2 NM									
CATEGORY	A		B		C		D		
RNP 0.30 DA*	2457-7/8 390 (300-7/8)								
RNP 0.30 DA	2508-1 441 (400-1)								
AUTHORIZATION REQUIRED									