



VORTAC LAS 116.9 Chan 116	APP CRS 262°		26L	26R
		Rwy Ldg	10526	12638
		TDZE	2069	2067
		Apt Elev	2181	2181

VOR RWY 26L/R
HARRY REID INTL (LAS)

	For inop ALS, increase S-26L and S-26R Cat D visibility ¼ SM.		MALSF Rwy 26L	MALS Rwy 26R	MISSED APPROACH: Climb to 4000 then climbing left turn to 6000 on heading 074° and BLD R-270 to BLD VORTAC and hold.			
D-ATIS	LAS VEGAS APP CON	LAS VEGAS TOWER			GND CON		CNLC DEL	CPDLC
132.4	125.025 379.15 (West) 119.775 282.2 (East)	118.75 257.8 (Rwy 1L/19R, 1R/19L) 119.9 257.8 (Rwy 8L/26R, 8R/26L)	121.1 270.8 E of 1R/19L 121.9 254.3 W of 1L/19R				118.0	

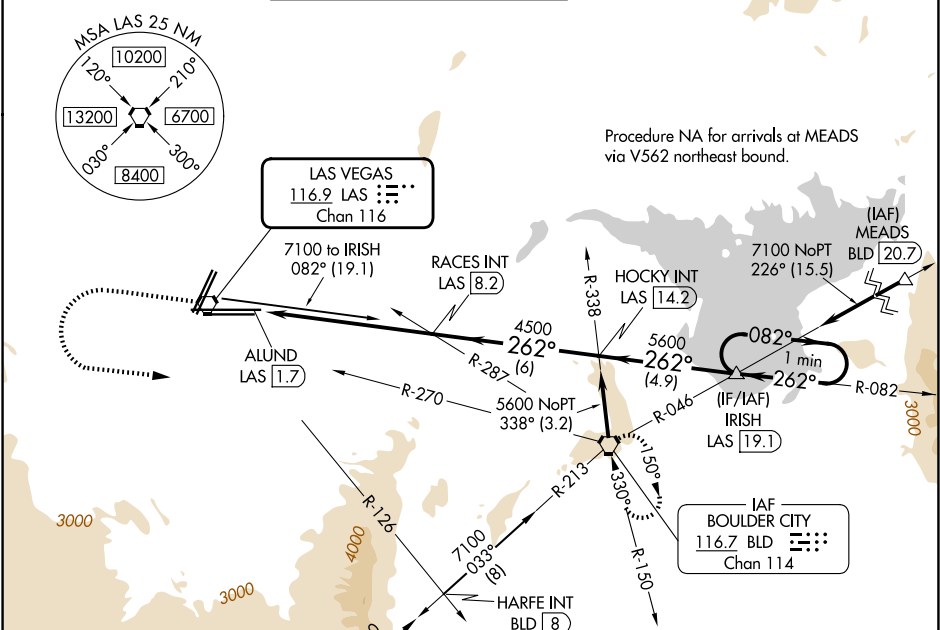

ELEV 2181	D	TDZE 26L 2069 TDZE 26R 2067
-----------	----------	--------------------------------



REIL Rwy 1R, 8R, 19L and 19R					
MIRL Rwy 1R-19L					
HIRL Rwy 1L-19R, 8L-26R and 8R-26L					
FAF to MAP 6.5 NM					
Knots	60	90	120	150	180
Min:Sec	6:30	4:20	3:15	2:36	2:10

CATEGORY	A		B		C		D	
	2720-3/4		651 (600-3/4)		2720-1 1/8		651 (600-1 1/8)	
S-26R	2720-3/4		653 (600-3/4)		2720-1 1/8		653 (600-1 1/8)	
	3020-1 1/4		3060-1 1/4		3100-2 3/4		3540-3	
CIRCLING	839 (900-1 1/4)		879 (900-1 1/4)		919 (1000-2 3/4)		1359 (1400-3)	

SW-4, 02 OCT 2025 to 30 OCT 2025

SW-4, 02 OCT 2025 to 30 OCT 2025