

APP CRS 172°	Rwy Ldg TDZE Apt Elev	9020 4457 4457
------------------------	-----------------------------	---

RNAV (GPS) RWY 17
LOGAN-CACHE (LGU)

   -14°C	DME/DME RNP-0.3 NA. Circling NA east of Rwy 17-35. Night Landing: Rwy 10-28 NA. Inop table does not apply to LNAV Cats C/D. *Missed approach requires minimum climb of 310 feet per NM to 7700.	MALSR 	MISSED APPROACH: Climbing right turn to 10000 direct P1ME and hold, continue climb-in-hold to 10000.
---	--	--	---

ASOS 135.275	SALT LAKE CENTER 127.7 354.125	UNICOM 122.8 (CTAF) 0
------------------------	--	---------------------------------

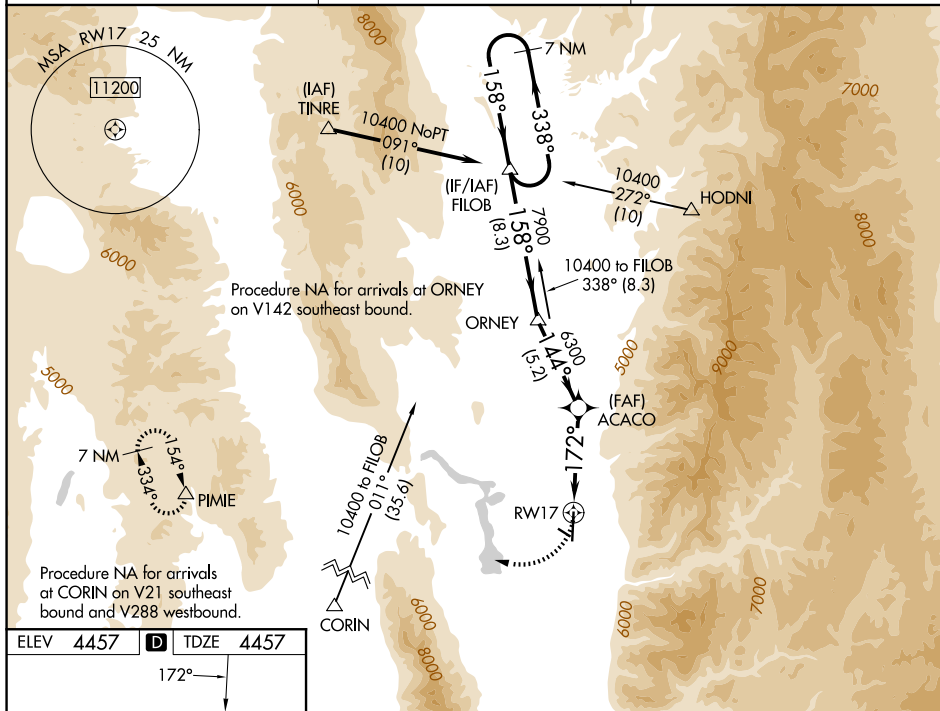


Diagram illustrating the PIMIE 10000m holding pattern. The pattern is defined by a 1.9 NM radius, a 3.7 NM radius, and a 5.2 NM radius. The pattern is divided into four segments: A (1.9 NM), B (3.7 NM), C (5.2 NM), and D (8.3 NM). The pattern is labeled with 'PIMIE 10000' and 'VGS and descent angles not coincident (VGS Angle 3.00/TCH 45)'. The diagram also shows the 'ACACO' and 'ORNEY' waypoints, and the 'FILOB' holding pattern. The diagram includes a table with the following data:

CATEGORY	A	B	C	D
*LNAV MDA	5100- $\frac{1}{2}$	643 (700- $\frac{1}{2}$)	5100- $1\frac{3}{8}$	643 (700- $1\frac{3}{8}$)
LNAV MDA	5800- $\frac{3}{4}$ 1343 (1400- $\frac{3}{4}$)	5800-1 1343 (1400-1)	5800-3	1343 (1400-3)
CIRCLING	5800- $1\frac{1}{4}$ 1343 (1400- $1\frac{1}{4}$)	5800- $1\frac{1}{2}$ 1343 (1400- $1\frac{1}{2}$)	5800-3	1343 (1400-3)