


|                                        |                        |                                                   |
|----------------------------------------|------------------------|---------------------------------------------------|
| WAAS<br>CH <b>93709</b><br><b>W30A</b> | APP CRS<br><b>304°</b> | Rwy Ldg<br>TDZE <b>155</b><br>Apt Elev <b>155</b> |
|----------------------------------------|------------------------|---------------------------------------------------|

RNAV (GPS) RWY 30

MERCED YOSEMITE RGNL (MCE)

|                                                                                                                                                                                                    |                                                                                            |                                                                                       |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| RNP APCH.<br>▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -3°C or above 54°C. For inoperative ALS, increase LNAV Cats C/D visibility to 1 3⁄8 SM. Circling NA northeast of Rwy 12-30. | MALSR<br> | MISSED APPROACH: Climb to 1000 then climbing left turn to 3000 direct VOLTA and hold. |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|

|                        |                                        |                                 |
|------------------------|----------------------------------------|---------------------------------|
| ASOS<br><b>132.175</b> | NORCAL APP CON<br><b>120.95 269.45</b> | UNICOM<br><b>122.7 (CTAF) 0</b> |
|------------------------|----------------------------------------|---------------------------------|

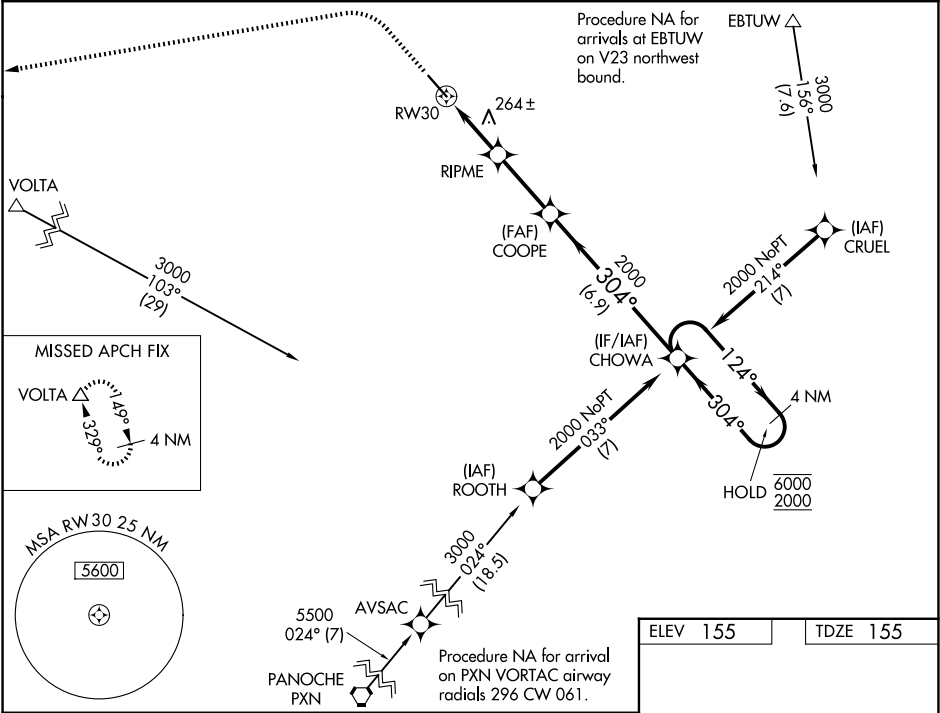

|               |           |                      |                      |                        |               |                         |                    |
|---------------|-----------|----------------------|----------------------|------------------------|---------------|-------------------------|--------------------|
| 1000<br>↑     | 3000<br>↙ | VOLTA<br>△           |                      |                        |               |                         |                    |
| *LNAV only    |           |                      | RIPME                | COOPE                  | CHOWA         | 4 NM<br>Holding Pattern |                    |
| RW30<br>↙     |           |                      | ↘                    | ↙                      | ↘             | ↗                       | ↖                  |
| 1 NM          |           |                      | 1.8 NM               | 2.8 NM                 | 6.9 NM        | 124°                    | 6000               |
|               |           |                      |                      | 1100*                  | 304°          | 304°                    | 2000               |
|               |           |                      |                      |                        |               |                         | GP 3.00°<br>TCH 53 |
| CATEGORY      |           | A                    |                      | B                      | C             | D                       |                    |
| LPV           | DA        |                      |                      | 355-1½                 | 200 (200-½)   |                         |                    |
| LNAV/<br>VNAV | DA        |                      |                      | 544-5⁄8                | 389 (400-5⁄8) |                         |                    |
| LNAV MDA      |           | 520-½                | 365 (400-½)          | 520-5⁄8                |               | 365 (400-5⁄8)           |                    |
| CIRCLING      |           | 560-1<br>405 (500-1) | 620-1<br>465 (500-1) | 620-1½<br>465 (500-1½) |               | 720-2<br>565 (600-2)    |                    |

