

WAAS CH 87118 W01A	APP CRS 012°	Rwy Ldg TDZE Apt Elev	5000 324 328
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 1

FLOYD BENNETT MEML (GFL)


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C (0°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received use Albany altimeter setting and increase all DA 91 feet and all MDA 100 feet; increase LNAV/VNAV all Cats ¾ SM, LNAV Cat C/D and Circling Cat C visibility ¼ SM. For inoperative ALS when using Albany altimeter setting, increase LPV all Cats visibility to ¾ SM. Baro-VNAV and VDP NA when using Albany altimeter setting. Circling Rwy 12, 30 NA at night. Rwy 12, 30 helicopter visibility reduction below 1 SM NA.

MALSRL


MISSED APPROACH:
Climb to 900 then climbing right turn to 3500 direct EKAKE and hold.


-18°C

ASOS 119.925	ALBANY APP CON 132.825 307.2	UNICOM 123.0 (CTAF) 0
------------------------	--	---------------------------------

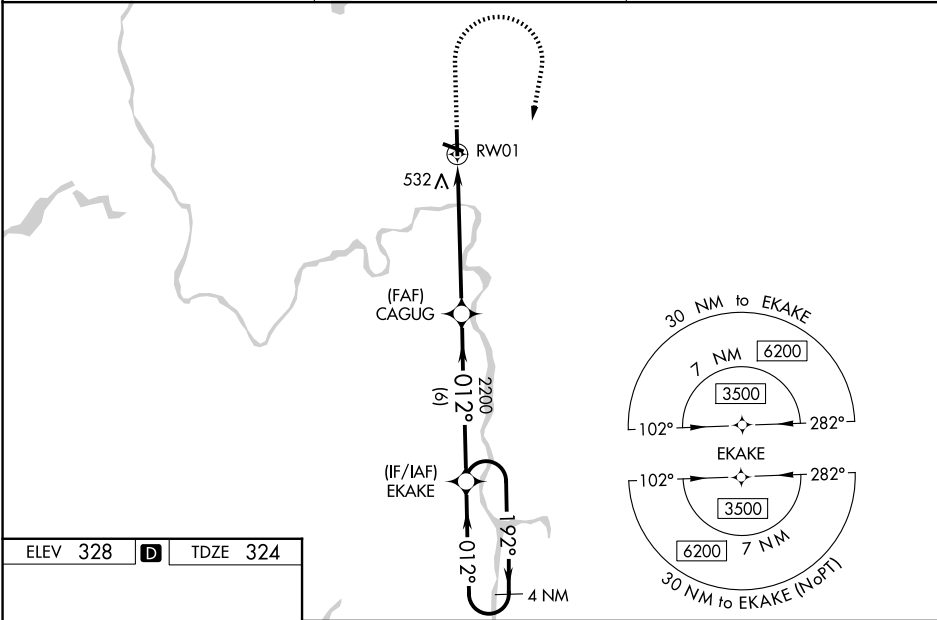

ELEV 328	D	TDZE 324
----------	----------	----------

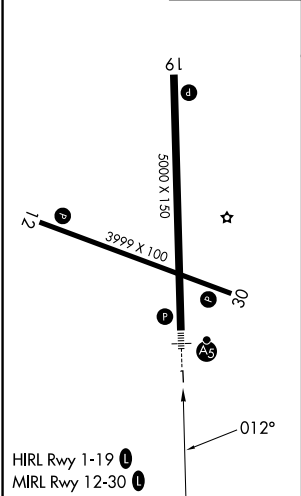

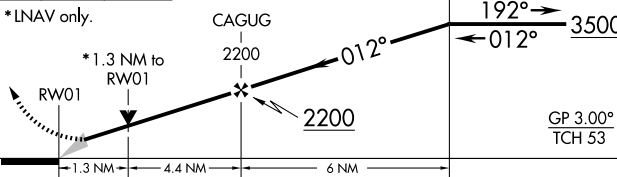900	3500	EKAKE	4 NM Holding Pattern		
					
*LNAV only.					
					
CATEGORY	A		B	C	D
LPV DA	524-1½		200 (200-½)		
LNAV/VNAV DA	835-1¼		511 (600-1¼)		
LNAV MDA	800-1½	476 (500-½)	800-1	476 (500-1)	
CIRCLING	840-1 512 (600-1)	860-1 532 (600-1)	940-1¾ 612 (700-1¾)	1960-3 1632 (1700-3)	

NE-2, 02 OCT 2025 to 30 OCT 2025

NE-2, 02 OCT 2025 to 30 OCT 2025