

OXNARD, CALIFORNIA

AL-674 (FAA)

25107

WAAS CH 86299 W25A	APP CRS 256°	Rwy Idg 5500 TDZE 44 Apt Elev 45
--	------------------------	---

RNAV (GPS) RWY 25
OXNARD (OXR)

RNP APCH - GPS.


T Inoperative table does not apply. Baro-VNAV NA when using Camarillo altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 43°C. When local altimeter setting not received, use Camarillo altimeter setting and increase LPV DA to 440 feet, LNAV/VNAV DA to 437 feet. Increase all MDAs 20 feet and Circling Cat C visibility ½ SM.

MAISE



MISSED APPROACH: Climb to 2000 direct PEWKEE and on track 239° to SQUID and hold.

ATIS 118.05	POINT MUGU APP CON* 124.7 335.5	OXNARD TOWER* 134.95 (CTAF) 0 257.8	GND CON 121.9
-----------------------	---	---	-------------------------

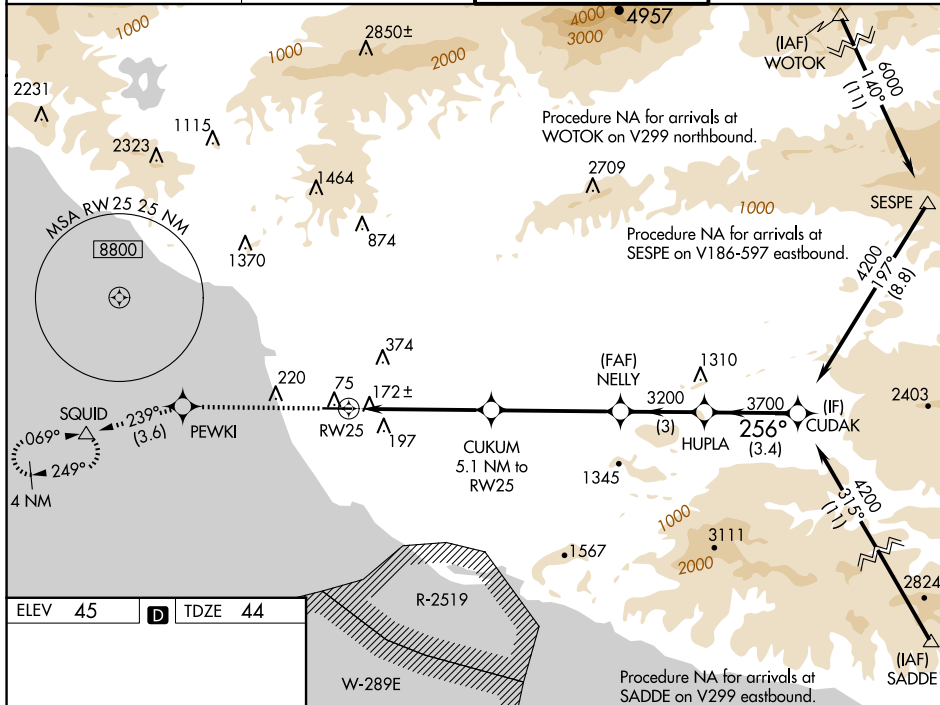

CATEGORY	A	B	C	D
LPV DA	424-1	380 (400-1)		
LNAV/VNAV DA	421-1	377 (400-1)		
LNAV MDA	520-1	476 (500-1)	520-1 $\frac{3}{8}$	476 (500-1 $\frac{3}{8}$)
CIRCLING	520-1	475 (500-1)	700-1 $\frac{3}{4}$ 655 (700-1 $\frac{3}{4}$)	760-2 $\frac{1}{4}$ 715 (800-2 $\frac{1}{4}$)

OXNARD, CALIFORNIA

Amdt 1D 05SEP24

34°12'N-119°12'W

OXNARD (OXR)
RNAV (GPS) RWY 25

SW-3, 02 OCT 2025 to 30 OCT 2025

SW-3, 02 OCT 2025 to 30 OCT 2025