

LOC I-RIW <u>110.5</u>	APP CRS 284°	Rwy Idg TDZE Apt Elev	8204 5459 5516
----------------------------------	------------------------	-----------------------------	---

ILS or LOC RWY 28
CENTRAL WYOMING RGNL (RIW)


T When local altimeter setting not received, use Lander altimeter setting: increase
A NA DA to 5713 feet; increase all MDA 60 feet and S-LOC 28 Cat C and D visibility
 ¼ mile. For Inop MALSR, when using Lander altimeter setting, increase S-ILS 28
 all Cats visibility to ¾ mile and S-LOC 28 Cat C and D visibility to 1¾ mile.
 VDP NA when using Lander altimeter setting.

MALSR



MISSED APPROACH: Climb to 6800 then climbing right turn to 7700 direct RIW VOR/DME and hold, continue climb-in-hold to 7700.

ASOS	SALT LAKE CENTER	UNICOM
121.425	133.25 285.6	122.8 (CTAF) 0

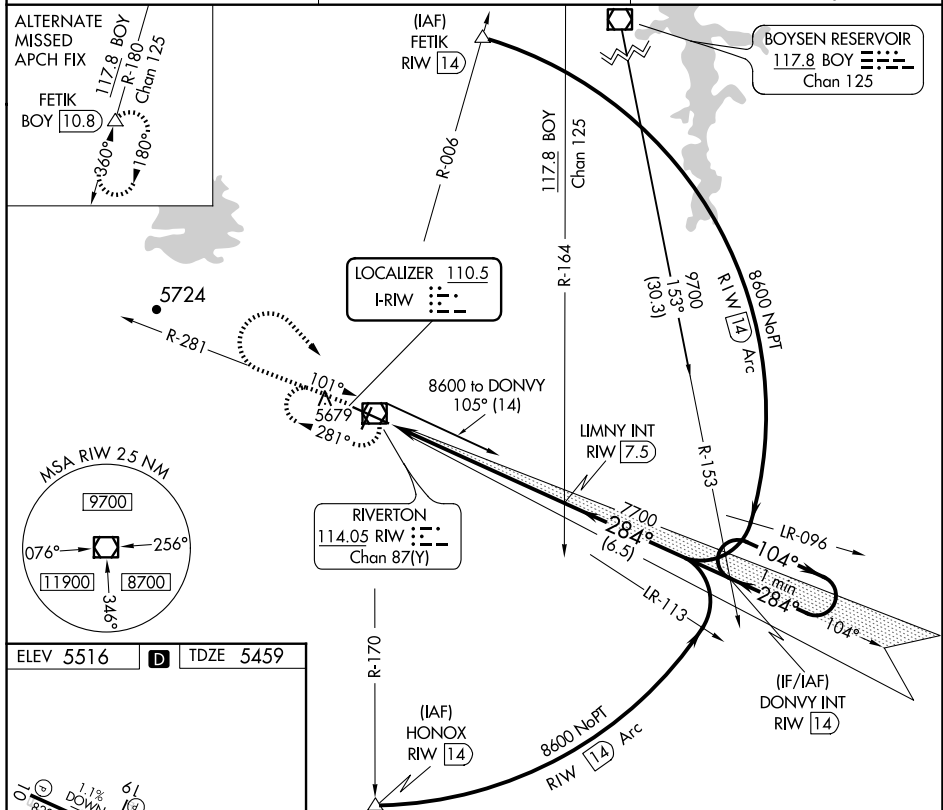

REIL Rwy 1, 10 and 19

MIRL Rwy 1-19

HIRL Rwy 10-28

FAF to MAP 6.9 NM					
Knots	60	90	120	150	180
Min:Sec	6:54	4:36	3:27	2:46	2:18

CATEGORY	A	B	C	D
S-ILS 28	5659-½ 200 (200-½)			
S-LOC 28	5880-½ 421 (400-½)		5880-¾ 421 (400-¾)	
C CIRCLING	6000-1 484 (500-1)		6000-1½ 484 (500-1½)	6120-2 604 (700-2)

NW-1, 02 OCT 2025 to 30 OCT 2025