

WAAS CH 61110 W32A	APP CRS 319°	Rwy Ldg TDZE 750 Apt Elev 755
--	------------------------	---

RNAV (GPS) RWY 32R

UNIVERSITY OF ILLINOIS/WILLARD (CMI)

⚠



For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1° C (-2° F) or above 54° C (130° F). DME/DME RNP-0.3 NA. Baro-VNAV and VDP NA when using Rantoul altimeter setting. When local altimeter setting not received, use Rantoul altimeter setting and increase all DA 41 feet, all MDA 60 feet; increase LNAV Cat C/D visibility to RVR 5500. For inoperative MALSR, when using local or Rantoul altimeter setting, increase LNAV Cat C/D visibility to 1½ miles.

MALSR

MISSED APPROACH:

Climb to 2800 direct HIPUB and on track 287° to LODGE and hold.

ATIS 124.85	CHAMPAIGN APP CON ★ 121.35 285.65 (319°-138°) 132.85 290.225 (139°-318°)	CHAMPAIGN TOWER ★ 120.4 (CTAF) 0 229.4	GND CON 121.8	UNICOM 122.95
-----------------------	--	---	-------------------------	-------------------------

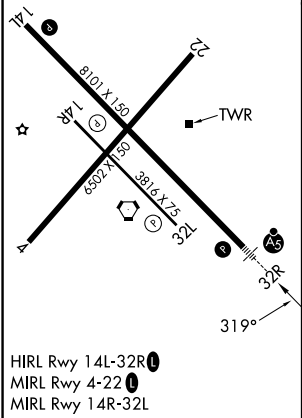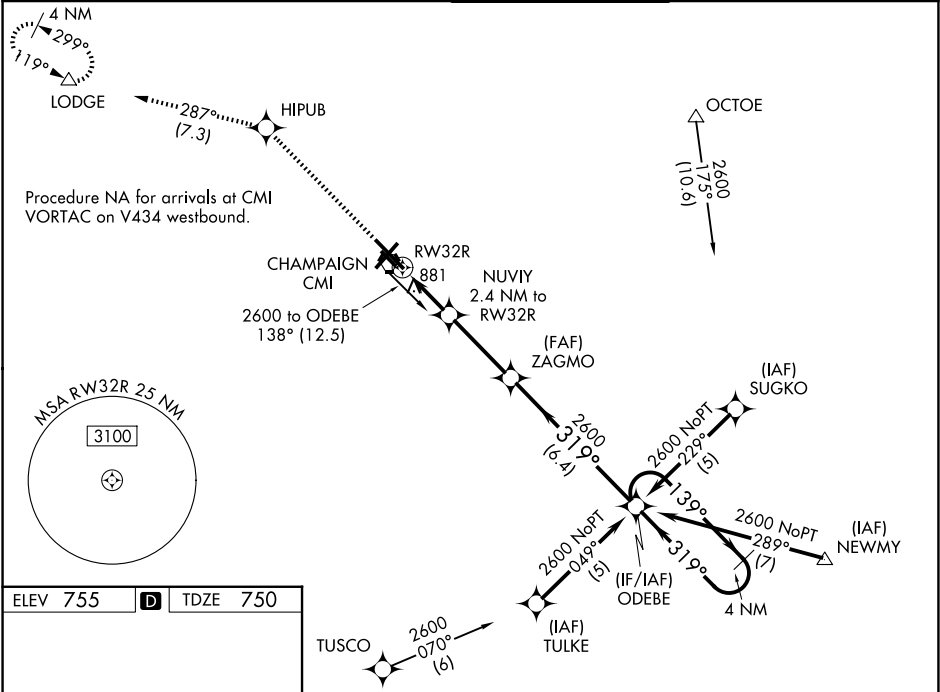

2800	HIPUB	tr 287°	LODGE	ZAGMO	ODEBE	4 NM Holding Pattern
* LNAV only	NUVIY 2.4 NM to RW32R	* 1560	2600	319°	139°	2600
RW32R				2600		GP 3.00° TCH 52
1 NM	1.4 NM	3.2 NM	6.4 NM			
CATEGORY	A	B	C	D		
LPV DA		1000/24	250 (300-½)			
LNAV/VNAV DA		1159/50	409 (500-1)			
LNAV MDA	1200/24	450 (500-½)	1200/45	450 (500-¾)		
CIRCLING	1240-1	485 (500-1)	1500-2¼ 745 (800-2¼)	1500-2½ 745 (800-2½)		

EC-3, 02 OCT 2025 to 30 OCT 2025

EC-3, 02 OCT 2025 to 30 OCT 2025