

WAAS CH 49127 W30A	APP CRS 300°	Rwy Idg TDZE 679 Apt Elev 682
--	------------------------	---

RNAV (GPS) RWY 30

DECATUR (DEC)


RNP APCH.

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C.

▲ When local altimeter setting not received, use Lincoln altimeter setting and increase all DA/MDA 80 feet, increase LNAV Cat C/D and Circling Cat C/D visibility ¼ SM. Baro-VNAV and VDP NA when using Lincoln altimeter setting.

MISSED APPROACH:
Climb to 3000 direct YENVU and hold.

ATIS 126.35	CHAMPAIGN APP CON★ 132.85 290.225	DECATUR TOWER★ 118.9 (CTAF) 0 291.775	GND CON 121.75 291.775	UNICOM 122.95
-----------------------	---	---	----------------------------------	-------------------------

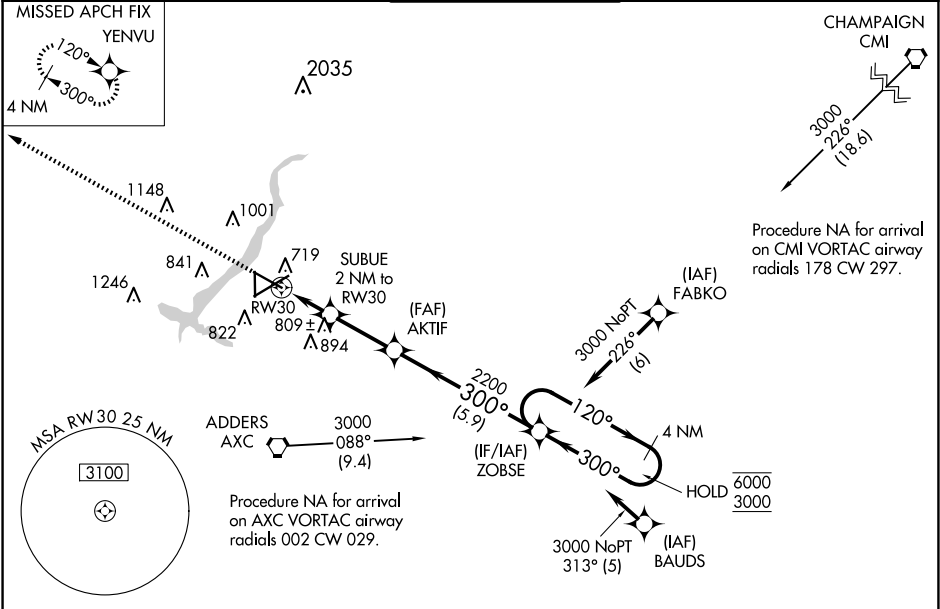

ELEV 682 D TDZE 679

TWR 752
MSL Rwy 30
HIRL Rwy 6-24
MIRL Rwy 12-30 and 18-36

3000	YENVU	AKTIF	ZOBSE	4 NM Holding Pattern
*LNAV only	SUBUE 2 NM to RW30	2200	120° 6000 300° 3000	GP 3.00° TCH 51
*1 NM to RW30	*1360	2200	300°	
1 NM	1 NM	2.6 NM	5.9 NM	
CATEGORY	A	B	C	D
LPV DA	879-1 200 (200-1)			
LNAV/VNAV DA	929-1 250 (300-1)			
LNAV MDA	1060-1 381 (400-1)		1060-1½ 381 (400-1½)	
CIRCLING	1140-1 458 (500-1)	1240-1 558 (600-1)	1360-2 678 (700-2)	1360-2¼ 678 (700-2¼)

EC-3, 02 OCT 2025 to 30 OCT 2025

EC-3, 02 OCT 2025 to 30 OCT 2025